

股票代码：603617



WE START
WITH PRECISION.

“泵”通天下 让生活更美好



JUNHE PUMP PRODUCT BROCHURE

水泵产品样册



地址：浙江省宁波市海曙区集士港镇广蔺路 288 号
电话：400-0574-898
网址：www.junhepumps.com

No. 288, Guanglin Road, Jishigang Town, Haishu District,
Ningbo City, Zhejiang Province
TEL: 400-0574-898
WEB: www.junhepumps.com



www.junhepumps.com

君禾泵业股份有限公司
JUNHE PUMPS HOLDING CO., LTD



公司简介

君禾泵业股份有限公司是一家专业研发、生产、销售水泵的高新技术企业，是全球优秀的水泵制造商。

公司成立于 1999 年，现有员工近两千余人，公司现代化标准厂房占地面积近 40 万平方米。年产能可在 600 万台以上；公司于 2017 年在上交所 A 股主板挂牌上市。股票简称：君禾股份 股票代码：603617

产品包含：深井泵、花园泵、自吸泵、污水泵、潜水泵、屏蔽泵、永磁变频泵、游泳池泵、切割泵、油浸泵、振动泵等系列。

公司秉承“君子以德、禾生万物”的经营理念，不断拓展国内外市场，经销网点遍布全球各地。“品质、服务、信誉”是公司企业文化的基础，“务实、创新、卓越”是企业长期追求的目标，公司先后通过了 CE、GS、EMC、

UL、CSA 等国际产品认证和 ISO9001、ISO14001 等管理体系认证。

作为家用泵行业的领先企业，公司不断加强产学研合作，提高企业科研实力和人才竞争力并创建了省级研发中心，促进我公司在水泵行业的技术进步、节能降耗和可持续发展。

近年来，公司已形成包括发明专利在内的自主知识产权核心竞争能力，与欧美多家国际知名企业建立战略合作伙伴关系，获得了国际市场的普遍认可。

Company Profile

Junhe Pump Industry Co., Ltd. is a high-tech enterprise specializing in R&D, production and sales of pumps, and is one of the world's leading pump manufacturer.

Founded in 1999, the company has nearly 2,000 employees, and the company's modern standard factory covers an area of nearly 400,000 square meters. The annual production capacity is more than 6 million units; The company was listed on the A-share main board of the Shanghai Stock Exchange in 2017. Stock abbreviation: Junhe shares. Stock code: 603617

Products include: deep well pumps, garden pumps, self-priming pumps, sewage pumps, submersible pumps, shielded pumps, permanent magnet variable frequency pumps, swimming pool pumps, cutting pumps, oil immersion pumps, vibration pumps and other series.

The company adheres to the business philosophy of "gentlemen with virtue and all things with crops", and constantly expands domestic and foreign markets, with distribution outlets all over the world. "Quality, service,

reputation" is the basis of the company's corporate culture, "pragmatism, innovation, excellence" is the long-term pursuit of the company's goal, the company has passed CE, GS, EMC, UL, CSA and other international product certifications and ISO9001, ISO14001 and other management system certification.

As a leading enterprise in the household pump industry, the company has continuously strengthened industry-university-research cooperation, improved the scientific research strength and talent competitiveness of the enterprise, and established a provincial R&D center to promote the technological progress, energy saving and sustainable development of our company in the pump industry.

In recent years, the company has formed the core competitiveness of independent intellectual property rights, including invention patents, and has established strategic partnerships with many internationally renowned enterprises in Europe and the United States, which has been widely recognized by the international market.

集团情况

君禾集团秉承“立足泵主业，做足水文章”的发展理念，围绕水泵等水系统产品进行全产业链上下游布局，集团以君禾泵业股份有限公司（股票代码 603617.SH）为核心，旗下拥有君禾智能、君禾智控、君禾塑业、君霖塑业、君禾线缆、蓝鳍科技、蓝鳍电商、香港君禾、美国君禾、君禾清洁等多家子公司，集团充分发挥全产业链协同效应，打造具有国际竞争力的水系统产业体系。

25 年
制造经验
Manufacturing
experience

150 百万美元
million
dollars

年度收入
Annual revenue

40 万 m²
ten
thousand

标准厂房面积
Standard plant area

1500 人
more than

员工
Employee

Group Situation

Junhe Group adheres to the development concept of "based on the main business of pumps and making enough water articles", and carries out the upstream and downstream layout of the whole industrial chain around water system products such as 603617 pumps. SH) as the core, with Junhe Intelligence, Junhe Intelligent Control, Junhe Plastics, Junlin Plastics, Junhe Cable, Bluefin Technology, Bluefin E-commerce,

Hong Kong Junhe, United States Junhe, Junhe Cleaning and other subsidiaries, the group gives full play to the synergy effect of the whole industry chain and creates an internationally competitive water system industrial system.

股票代码: 603617

CONTENS

产品目录



05 潜水泵系列
SUBMERSIBLE PUMP SERIES



23 喷射泵系列
JET PUMP SERIES



31 旋涡泵系列
VORTEX PUMP SERIES



37 离心泵系列
CENTRIFUGAL PUMP SERIES



43 引擎泵系列
ENGINE PUMP SERIES



47 增压泵系列
BOOSTER PUMP SERIES



49 屏蔽泵系列
SHIELDED PUMPS SERIES


CSP SERIES PLASTIC SHELL SUBMERSIBLE PUMP

CSP 系列塑料壳潜水泵

产品应用 Product Application

家庭鱼池、喷泉循环、清水排水系统、抽排无固体颗粒物的雨水、积水等
Household fish ponds, fountain circulation, clean water drainage systems, Pumping out rainwater or stagnant water without solid particles

型号说明 Model Instruction

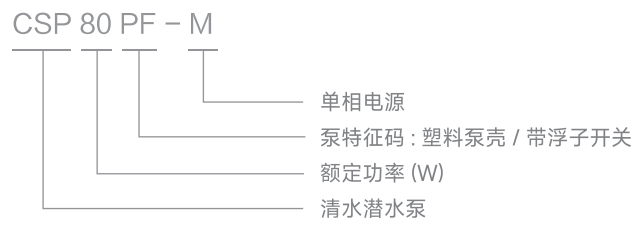

使用条件

- 介质温度：5-35°C
- 环境温度：0-40°C
- PH 值：6.5-8.5
- 潜水深度 < 7 米
- 固定体积含量不超过 0.1% 一般清水

产品特点

- 塑料壳体，塑料叶轮
- 铜线电机寿命长，内置过热保护器，不锈钢转轴
- 绝缘等级 F 级
- 防护等级 IPX8
- 电机轴密封处无液态油脂，不会有矿物油外泄污染水质


Conditions of Use

- Medium temperature: 5-35°C
- Ambient temperature: 0-40° C
- PH value: 6.5-8.5
- submersible depth: < 7m
- General clean water with solid volume content not exceeding 0.1%

Features


- Plastic housing, plastic impeller
- Copper wire motor has long life, built-in overheat protector, stainless steel shaft
- Insulation class F
- Protection level IPX8
- There is no liquid grease at the seal of the motor shaft, and there will be no mineral oil leakage to pollute the water quality

性能曲线 Performance Curves

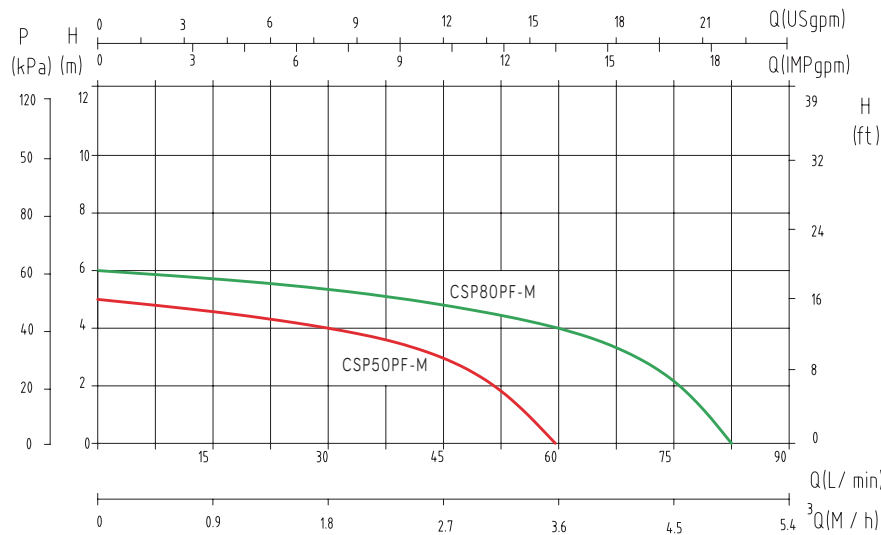

产品技术参数 Performance Data

型号 Model	功率 Power		出水口径 outlet	性能 Performance										
				流量 Flow rate	m³/h	0	1.2	2.4	3.6	4.8	5.4	/	/	/
	KW	HP	mm	流量 Flow rate	l/min	0	20	40	60	80	90	/	/	/
CSP80PF-M	0.08	0.1	25.4	扬程 Head	m	6	5.9	5.4	3.8	1.6	/	/	/	/
CSP50PF-M	0.05	0.07	25.4			5	4.5	3	0	/	/	/	/	/

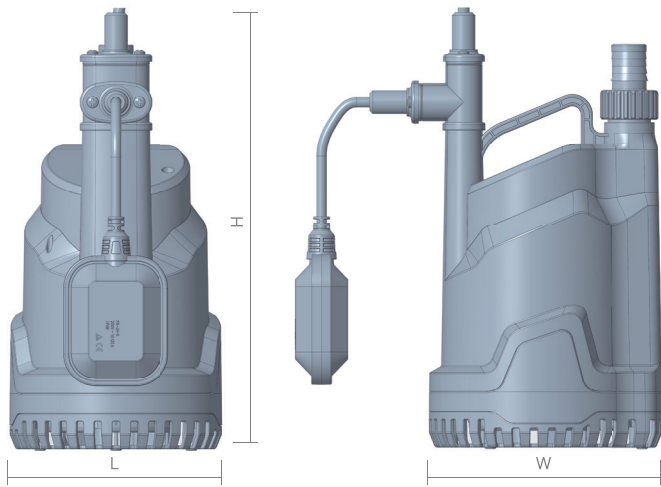

外形尺寸 Dimensions Size

型号 Model	外形尺寸 Dimensions Size (cm)			净重 Weight (Kg)
	长 L	宽 W	高 H	
CSP80PF-M	14.6	16.2	30	3.72
CSP50PF-M	14.6	16.2	30	3.47


WQ SERIES SUBMERSIBLE PUMPS

WQ 系列潜水泵

产品应用 Product Application

河道取水，农林灌溉，排涝，道路交通施工排水
River water intaking, agroforestry irrigation, drainage, road traffic construction drainage

型号说明 Model Instruction

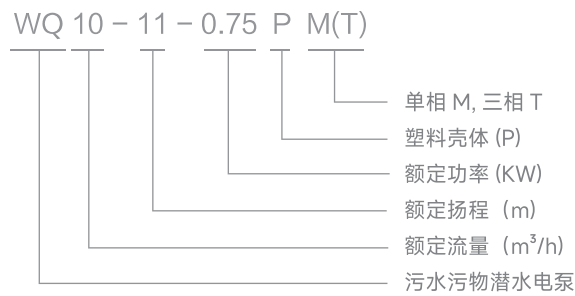

使用条件

- 介质最高温度：40°C
- 环境温度：0-40°C
- PH 值：4-10
- 潜水深度 ≤ 5 米
- 泥浆，灰浆，生活废水固体体积含量不超过 0.15% 清污水

产品特点

- 201/316 不锈钢壳体，塑料包胶叶轮，45#/316 轴
- 铜线电机寿命长
- 绝缘等级 B 级
- 防护等级 IPX8
- 双端面机封密封效果好


Conditions of Use

- Maximum temperature of medium: 40° C
- Ambient temperature: 0-40° C
- PH value: 4-10
- submersible depth.: ≤ 5m
- The solid volume content of slurry, mortar and domestic wastewater shall not exceed 0.15% of clean sewage

Features

- 201/316 stainless steel housing, plastic overmolded impeller, 45#/316 shaft
- Copper wire motor with long lifetime
- Insulation class B
- Protection level IPX8
- Double-ended mechanical seal with good sealing function

性能曲线 Performance Curves

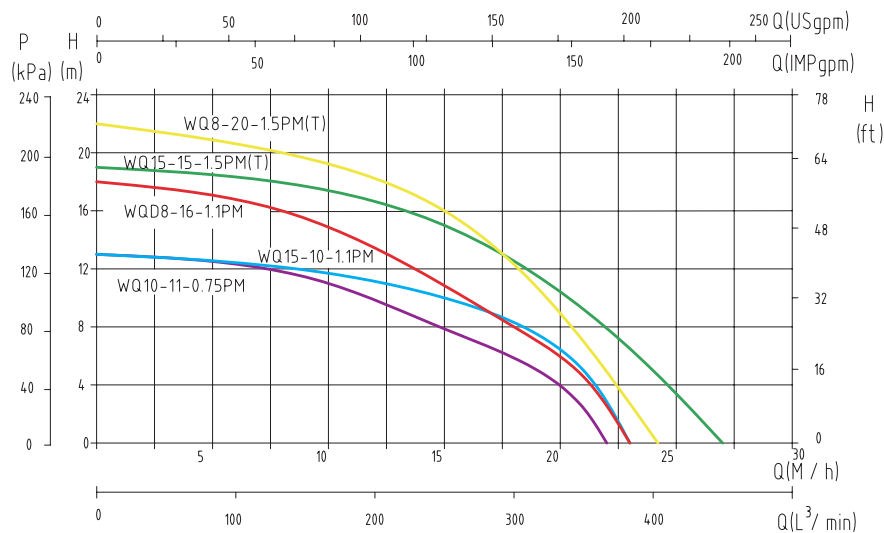


产品技术参数 Performance Data

型号 Model	功率 Power		出水口径 outlet	性能 Performance												
				流量 Flow rate	m³/h	0	3	6	9	12	15	18	21	24	27	
	KW	HP	mm	流量 Flow rate	l/min	0	50	100	150	200	250	300	350	400	450	
WQ10-11-0.75PM	0.75	1	50	扬程 Head	m	13	12.5	12	11	10	7	5	2	/	/	
WQ15-10-1.1PM	1.1	1.5	50			13	12.5	12	11.5	11	10	7	5	/	/	
WQ8-16-1.1PM	1.1	1.5	50			18	17.5	17	15	14	11	8	5	/	/	
WQ15-15-1.5PM	1.5	2	50			19	18.5	18	17	16	15	12.5	10	5	0.5	
WQ18-20-1.5PM	1.5	2	50			22	21.5	21	19.5	18	16	12	7	0.5	/	
WQ15-15-1.5PT	1.5	2	50			19	18.5	18	17	16	15	12.5	10	5	0.5	
WQ18-20-1.5PT	1.5	2	50			22	21.5	21	19.5	18	16	12	7	0.5	/	

外形尺寸 Dimensions Size

型号 Model	外形尺寸 Dimensions Size (cm)			净重 Weight (Kg)
	长 L	宽 W	高 H	
WQ10-11-0.75PM	26.8	23.9	45	11.6
WQ15-10-1.1PM	26.8	23.9	46.5	13.2
WQ8-16-1.1PM	26.8	23.9	46.5	13.2
WQ15-15-1.5PM	26.8	23.9	48.5	14.9
WQ18-20-1.5PM	26.8	23.9	50.5	16.9
WQ15-15-1.5PT	26.8	23.9	48.5	15.4
WQ18-20-1.5PT	26.8	23.9	50.5	17.4

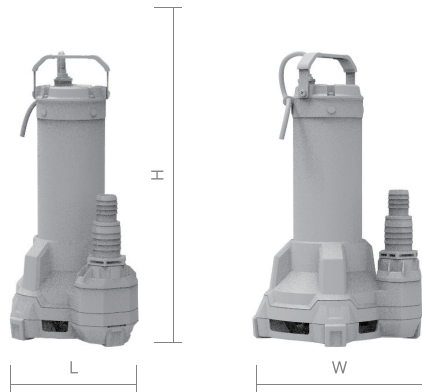


QDX SERIES ALUMINIUM SHELL SUBMERSIBLE PUMP

QDX 系列铝壳潜水泵

产品应用 Product Application

园林浇水，农林灌溉，河道取水
Garden watering, agroforestry irrigation, river water intaking

型号说明 Model Instruction

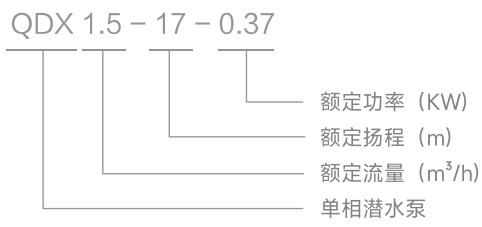

使用条件

- 介质温度：2-50°C
- 环境温度：0-40°C
- PH 值： 6.5-8.5
- 潜水深度 < 5 米
- 固定体积含量不超过 0.1% 一般清水

产品特点

- 铸铝壳体，铝叶轮，45# 镀铬轴
- 铜线电机寿命长
- 绝缘等级 B 级
- 防护等级 IPX8
- 双端面机封密封效果好


Conditions of Use

- Medium temperature: 2-50° C
- Ambient temperature: 0-40° C
- PH value: 6.5-8.5
- Submersible depth.: < 5m
- General clean water with solid volume content not exceeding 0.1%

Features

- Cast aluminum housing, aluminum impeller, 45# chrome-plated shaft
- Copper wire motor with long lifetime
- Insulation class B
- Protection level IPX8
- Double-ended mechanical seal with good sealing function

性能曲线 Performance Curves

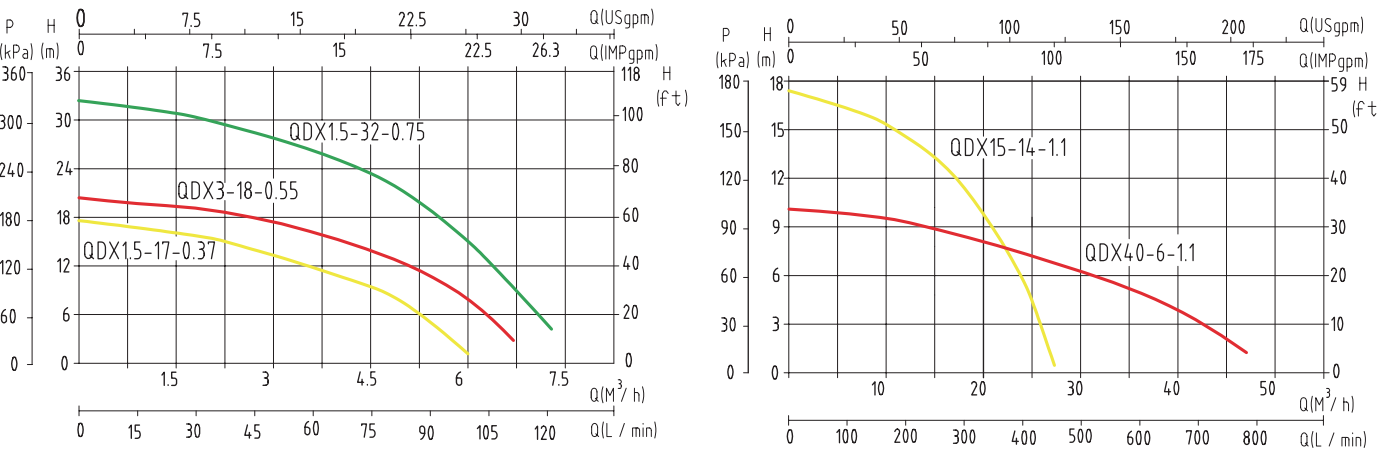


产品技术参数 Performance Data

型号 Model	功率 Power		出水口径 outlet	性能 Performance										
	KW	HP		mm	流量 Flow rate	m³/h	0	1.2	2.4	3.6	4.8	6	7.2	8.4
			流量 Flow rate		l/min	0	20	40	60	80	100	120	140	160
QDX1.5-17-0.37	0.37	0.5	25	扬程 Head	m	17.2	16.8	16	13.6	9.6	1.8	/	/	/
QDX3-18-0.55	0.55	0.75	25			19.8	19.2	18.8	16.9	14.8	8.8	0.6	/	/
QDX1.5-32-0.75	0.75	1	25			31.9	31.5	29.5	26	22.6	15.8	9.6	0.8	/

型号 Model	功率 Power		出水口径 outlet	性能 Performance										
	KW	HP		mm	流量 Flow rate	m³/h	0	6	12	18	24	30	36	42
			流量 Flow rate		l/min	0	100	200	300	400	500	600	700	800
QDX15-14-1.1	1.1	1.5	65	扬程 Head	m	17.5	17	15.4	12.1	5.3	0	/	/	/
QDX40-6-1.1	1.1	1.5	80			9.8	9.5	8.9	8.4	7.6	6.5	5.5	3.6	1.2

外形尺寸 Dimensions Size

型号 Model	外形尺寸 Dimensions Size (cm)			净重 Weight (Kg)
	长 L	宽 W	高 H	
QDX1.5-17-0.37	15	19.5	35	6.5
QDX3-18-0.55	16	20.5	41	9
QDX1.5-32-0.75	20	24	41.5	11
QDX15-14-1.1	17.5	24.5	45	13
QDX40-6-1.1	20	27	48	16

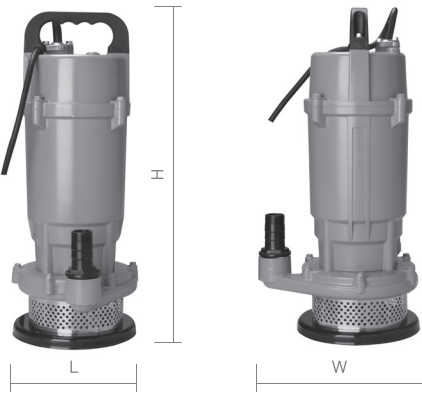


WQD SERIES SUMP PUMPS

WQD 污水泵

产品应用 Product Application

化粪池，养殖场，农林灌溉，排涝
Septic tanks, farms, agroforestry irrigation, drainage

型号说明 Model Instruction

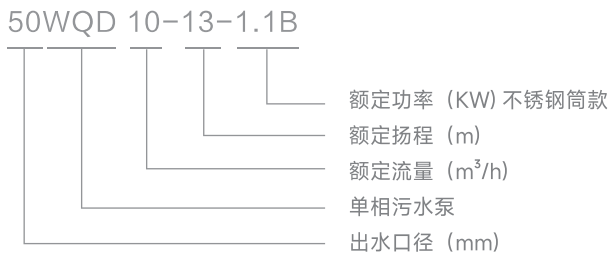

使用条件

- 介质温度：2-50°C
- 环境温度：0-40°C
- PH 值： 6.5-8.5
- 潜水深度 < 5 米
- 泥浆，灰浆，生活废水及有泥砂等固体颗粒及淤泥河塘

产品特点

- 铁壳体，不锈钢机筒，铁叶轮，合金切割刀，304 焊接轴
- 铜线电机寿命长
- 绝缘等级 B 级
- 防护等级 IPX8
- 碳化硅机封密封效果好寿命长


Conditions of Use

- Medium temperature: 2-50° C
- Ambient temperature: 0-40° C
- PH value: 6.5-8.5
- Submersible depth.: < 5m
- Mud, mortar, domestic wastewater and solid particles such as sediment and silt in rivers and ponds

Features

- Iron shell, stainless steel barrel, iron impeller, alloy cutting knife, 304 welded shaft
- Copper wire motor with long lifetime
- Insulation class B
- Protection level IPX8
- Silicon carbide machine seal, good sealing effect, long life

性能曲线 Performance Curves

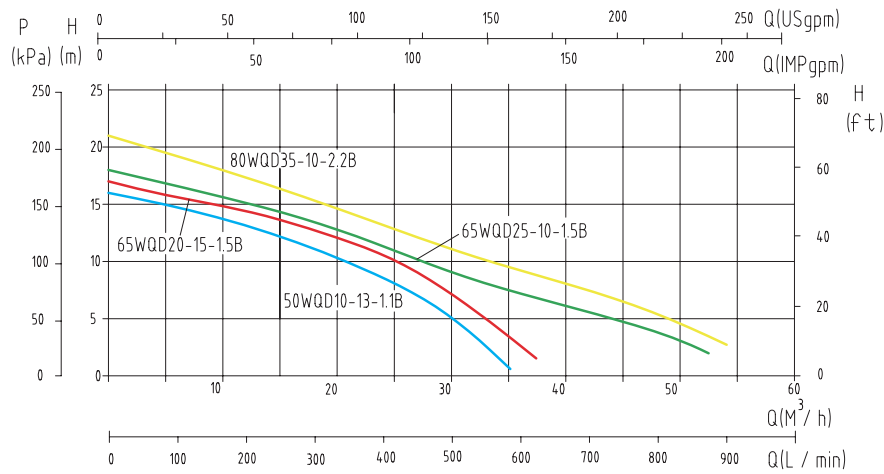


产品技术参数 Performance Data

型号 Model	功率 Power		出水口径 outlet	性能 Performance										
				流量 Flow rate	m³/h	0	3.9	7.8	11.7	15.6	19.2	22.8	26.4	30
	KW	HP	mm	流量 Flow rate	l/min	0	65	130	195	260	325	390	455	520
50WQD10-13-1.1B	1.1	1.5	50	扬程 Head	m	16	15	14	13	12	11	9	6	1
65WQD20-15-1.5B	1.5	2	65			17	16	15.6	15	14.4	13.8	12.4	10	7.5

型号 Model	功率 Power		出水口径 outlet	性能 Performance										
				流量 Flow rate	m³/h	0	7.8	15.6	23.4	31.2	39	46.8	54.6	62.4
	KW	HP	mm	流量 Flow rate	l/min	0	130	260	390	520	650	780	910	1040
65WQD25-10-1.5B	1.5	2	65	扬程 Head	m	18	16	14	11.5	9	6.5	4.5	1	/
80WQD35-10-2.2B	2.2	3	80			20.5	18	16	13	11.5	8	5.5	2	0

外形尺寸 Dimensions Size

型号 Model	外形尺寸 Dimensions Size (cm)			净重 Weight (Kg)
	长 L	宽 W	高 H	
50WQD10-13-1.1B	20	26	52.5	19.5
65WQD20-15-1.5B	20	27.5	58.5	19
65WQD25-10-1.5B	20	26	59	23
80WQD35-10-2.2B	20	28.5	63.5	26.5

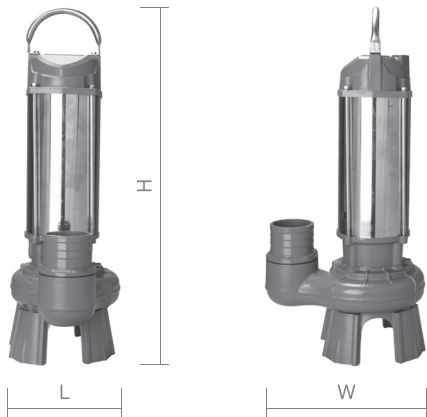


WQ SERIES SUMP PUMPS

WQ 污水泵

产品应用 Product Application

河道取水，农林灌溉，排涝，道路交通施工排水
River water intaking, agroforestry irrigation, drainage, road traffic construction drainage

型号说明 Model Instruction

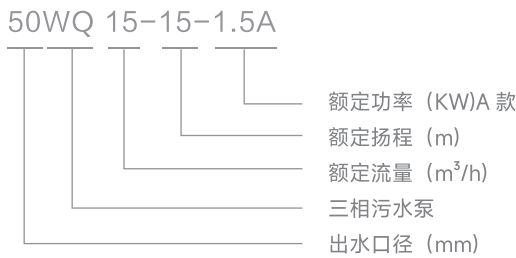

使用条件

- 介质温度: 2-50°C
- 环境温度: 0-40°C
- PH 值: 6.5-8.5
- 潜水深度 < 5 米
- 泥浆, 灰浆, 生活废水固体体积含量不超过 0.15% 清污水

产品特点

- 铁壳体, 铁叶轮, 45 号轴镀铬
- 铜线电机寿命长
- 绝缘等级 B 级
- 防护等级 IPX8
- 碳化硅机封密封效果好寿命长




Conditions of Use

- Medium temperature: 2-50° C
- Ambient temperature: 0-40° C
- PH value: 6.5-8.5
- Submersible depth.: < 5m
- The solid volume content of slurry, mortar and domestic wastewater shall not exceed 0.15% of clean sewage

Features

- Iron housing, iron impeller, chrome plating on 45 shaft
- Copper wire motor with long lifetime
- Insulation class B
- Protection level IPX8
- Silicon carbide machine seal, good sealing effect, long life

性能曲线 Performance Curves

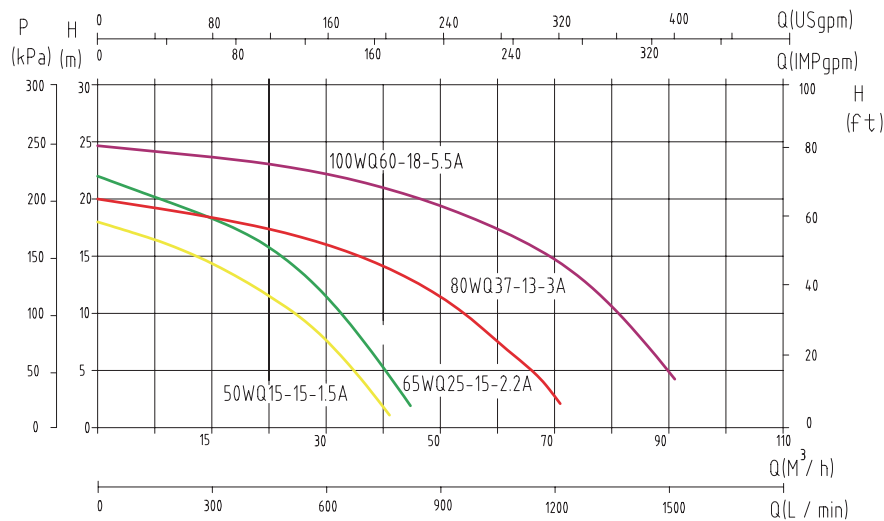


产品技术参数 Performance Data

型号 Model	功率 Power		出水口径 outlet	性能 Performance											
				流量 Flow rate	m³/h	0	6	12	18	24	30	36	42	48	
	KW	HP		mm	流量 Flow rate	l/min	0	100	200	300	400	500	600	700	800
50WQ15-15-1.5A	1.5	2	50	扬程 Head	m	18.5	16	15	13	11	8	4	1	/	
65WQ25-15-2.2A	2.2	3	65			22.5	20.5	18.5	17	15	12	8	4	0	

型号 Model	功率 Power		出水口径 outlet	性能 Performance											
	KW	HP		流量 Flow rate	m³/h	0	12	24	36	48	60	72	84	96	
			流量 Flow rate												l/min
80WQ37-13-3A	3	4	80	扬程 Head	m	20	18	17	15	12	7	1	/	/	
100WQ60-18-5.5A	5.5	7.5	100			25	23.5	22.5	21.5	20	17.5	14	7	1	

外形尺寸 Dimensions Size

型号 Model	外形尺寸 Dimensions Size (cm)			净重 Weight (Kg)
	长 L	宽 W	高 H	
50WQ15-15-1.5A	23	36	62	29
65WQ25-15-2.2A	23	37	64	45
80WQ37-13-3A	23	39	66	50
100WQ60-18-5.5A	26	45	77	88

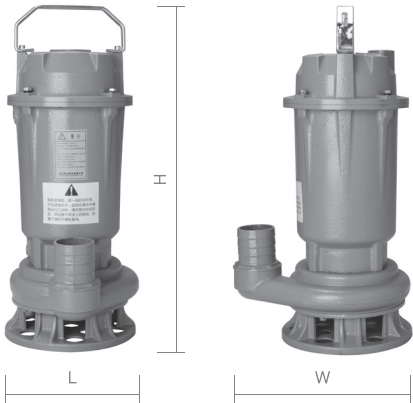


WQDK SERIES SUMP PUMPS

WQDK 污水泵

产品应用 Product Application

河塘清淤，农林灌溉，排涝，生活废水
River dredging, agroforestry irrigation, drainage, domestic wastewater

型号说明 Model Instruction

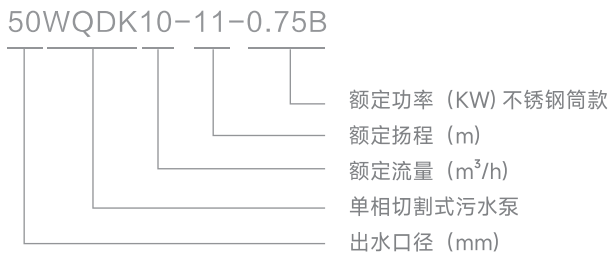

使用条件

- 介质温度: 2-50°C
- 环境温度: 0-40°C
- PH 值: 6.5-8.5
- 潜水深度 < 5 米
- 含有长短纤维，纸屑，泥砂等固体颗粒及河塘清淤

产品特点

- 铁壳体，不锈钢机筒，铁叶轮，合金切割刀，304 焊接轴
- 铜线电机寿命长
- 绝缘等级 B 级
- 防护等级 IPX8
- 碳化硅机封密封效果好寿命长


Conditions of Use

- Medium temperature: 2-50° C
- Ambient temperature: 0-40° C
- PH value: 6.5-8.5
- Submersible depth.: < 5m
- Contains long and short fibers, paper scraps, sediment and other solid granules and river dredging

Features

- Iron shell, stainless steel barrel, iron impeller, alloy cutting knife, 304 welded shaft
- Copper wire motor with long lifetime
- Insulation class B
- Protection level IPX8
- Silicon carbide machine seal, good sealing effect, long life

性能曲线 Performance Curves

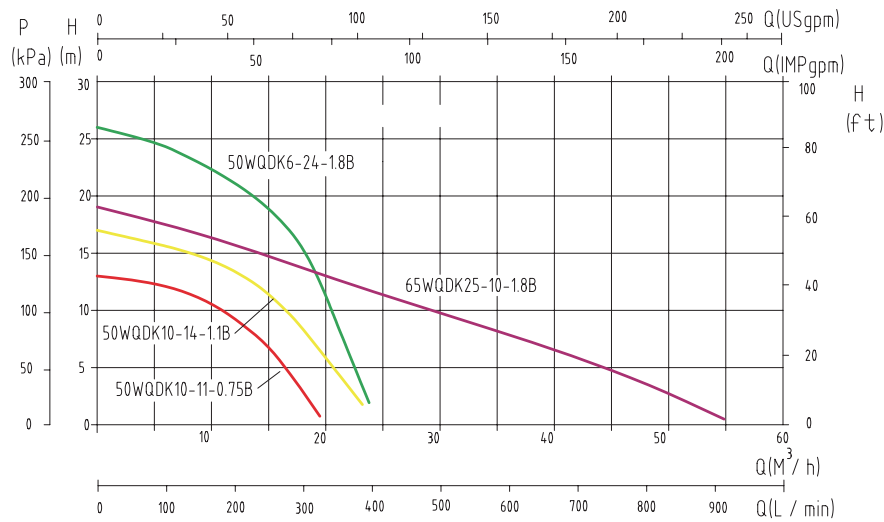


产品技术参数 Performance Data

型号 Model	功率 Power		出水口径 outlet	性能 Performance										
				流量 Flow rate	m³/h	0	3	6	9	12	15	18	24	27
	KW	HP	mm	流量 Flow rate	l/min	0	50	100	150	200	250	300	350	400
50WQDK10-11-0.75B	0.75	1	50	扬程 Head	m	13	12.5	12	10.2	9.8	7	1	/	/
50WQDK10-14-1.1B	1.1	1.5	50			17	16	15.2	14.5	13	11	8.5	1	/
50WQDK6-24-1.8B	1.8	2.5	50			26	25	24	22.5	21.5	18	14	0.5	/

型号 Model	功率 Power		出水口径 outlet	性能 Performance										
				流量 Flow rate	m³/h	0	7.5	15	22.5	30	37.5	45	52.5	60
	KW	HP	mm	流量 Flow rate	l/min	0	125	250	375	500	625	750	875	1000
65WQDK25-10-1.8B	1.8	2.5	65	扬程 Head	m	18	17	14.3	12	10	7	4.5	2.5	/

外形尺寸 Dimensions Size

型号 Model	外形尺寸 Dimensions Size (cm)			净重 Weight (Kg)
	宽 L	宽 W	高 H	
50WQDK10-11-0.75B	20	25.5	52.5	18
50WQDK10-14-1.1B	22.5	30	54.5	19.5
50WQDK6-24-1.8B	22.5	29	55	23.5
65WQDK25-10-1.8B	20	27.5	58.5	23.5

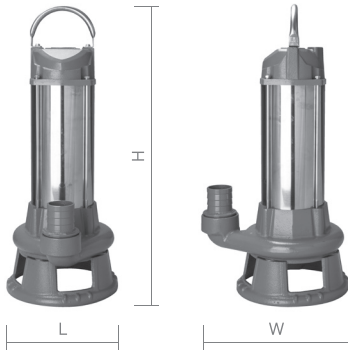


QY SERIES OIL IMMERSION PUMPS

QY 油浸泵

产品应用 Product Application

河道取水，农林灌溉，排涝，市政工程
River water intaking, agroforestry irrigation, drainage, municipal engineering

型号说明 Model Instruction

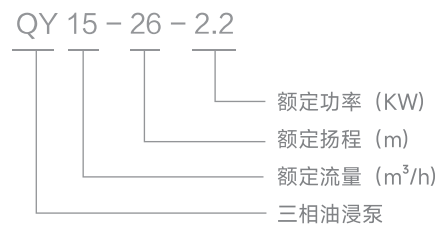

使用条件

- 介质温度: 2-50°C
- 环境温度: 0-40°C
- PH 值: 6.5-8.5
- 潜水深度 < 5 米
- 一般清水或固体体积含量不超过 0.1% 清水

产品特点

- 铁壳体，铁叶轮，45 号轴
- 铜线电机寿命长
- 绝缘等级 B 级
- 防护等级 IPX8
- 机封密封效果好寿命长
- 充油电机温升低


Conditions of Use

- Medium temperature: 2-50° C
- Ambient temperature: 0-40° C
- PH value: 6.5-8.5
- Submersible depth.: < 5m
- Generally, the volume content of clean water or solid should not exceed 0.1% clear water

Features

- Iron housing, iron impeller, No. 45 shaft
- Copper wire motor with long lifetime
- Insulation class B
- Protection level IPX8
- The machine seal has good sealing effect and long service life
- Low temperature rise of oil-filled motor

性能曲线 Performance Curves

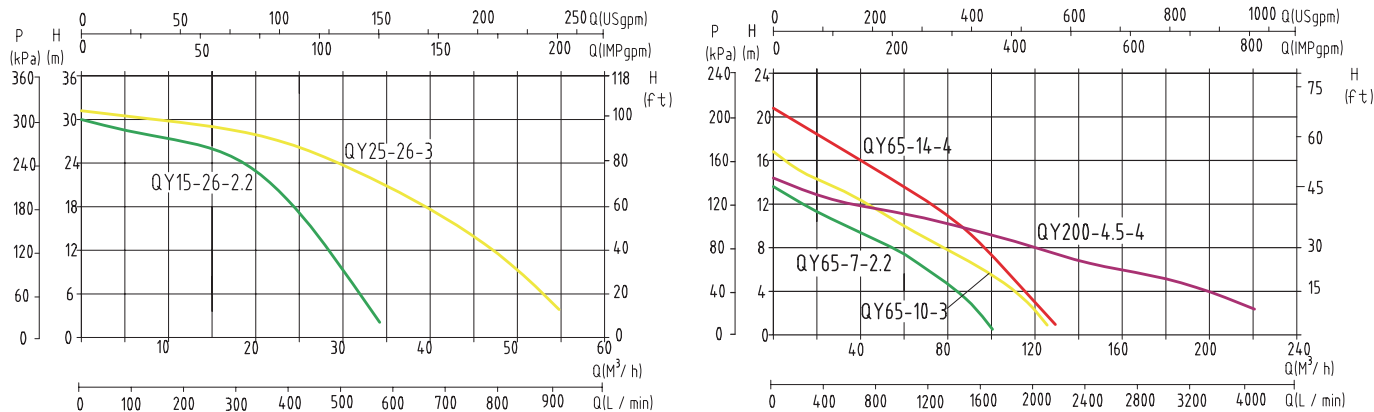

产品技术参数 Performance Data


型号 Model	功率 Power		出水口径 outlet	性能 Performance											
	KW	HP		流量 Flow rate	m³/h	0	6	12	18	24	30	36	42	48	54
			流量 Flow rate	l/min	0	100	200	300	400	500	600	700	800	900	
QY15-26-2.2	2.2	3	50	扬程 Head	m	30	28	26.5	25	18	8	0	/	/	/
QY25-26-3	3	4	65			31	30.5	29.5	29	27	24	20.5	17.5	13.5	4.5

型号 Model	功率 Power		出水口径 outlet	性能 Performance											
	KW	HP		mm	流量 Flow rate	m³/h	0	15	30	45	60	75	90	105	120
			流量 Flow rate		l/min	0	250	500	750	1000	1250	1500	1750	2000	2250
QY65-7-2.2	2.2	3	100	扬程 Head	m	13.5	11.5	10	9	7.5	6	3.2	/	/	/
QY65-10-3	3	4	100			16.5	15	13.5	11.5	10	8.5	7	4	2.5	0
QY65-14-4	4	5.5	100			21	18	17	15.5	13.5	12.5	9.5	4.8	3	0

型号 Model	功率 Power		出水口径 outlet	性能 Performance											
	KW	HP		流量 Flow rate	m³/h	0	30	60	90	120	150	180	210	240	270
				流量 Flow rate	l/min	0	500	1000	1500	2000	2500	3000	3500	4000	4500
QY200-4.5-4	4	5.5	200	扬程 Head		14.5	12.5	11	10	8.5	7	5	3.5	0.5	0

外形尺寸 Dimensions Size

型号 Model	外形尺寸 Dimensions Size (cm)			净重 Weight (Kg)
	长 L	宽 W	高 H	
QY15-26-2.2	23.5	25	57	41
QY25-26-3	24	25	51	45
QY65-7-2.2	23.5	24.5	63	41
QY65-10-3	23.5	25	57	45
QY65-14-4	23.5	23	69	49
QY200-4.5-4	21.5	25	74	52

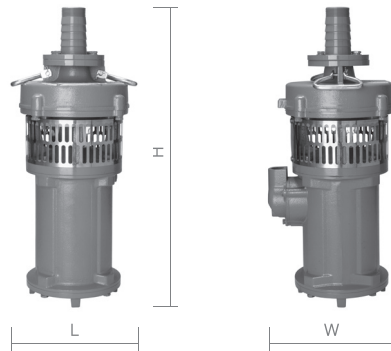


QYD SERIES SUBMERSIBLE PUMPS

QYD 系列潜水泵

产品应用 Product Application

园林浇水，农林灌溉，家庭生活用水
Garden watering, agroforestry irrigation, household water

型号说明 Model Instruction

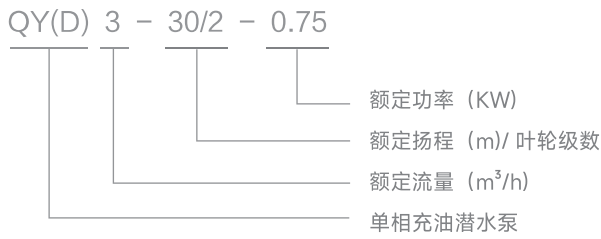

使用条件

- 介质温度：2-50°C
- 环境温度：0-40°C
- PH 值： 6.5-8.5
- 潜水深度 < 5 米
- 固定体积含量不超过 0.1% 一般清水

产品特点

- 铁壳体，铝叶轮，45# 镀铬轴
- 铜线电机寿命长
- 绝缘等级 B 级
- 防护等级 IPX8
- 双端面机械密封效果好


Conditions of Use

- Medium temperature: 2-50° C
- Ambient temperature: 0-40° C
- PH value: 6.5-8.5
- Submersible depth.: < 5m
- General clean water with solid volume content not exceeding 0.1%

Features

- Iron housing, aluminum impeller, 45# chrome plated shaft
- Copper wire motor with long lifetime
- Insulation class B
- Protection level IPX8
- Double-ended mechanical seal with good sealing function

性能曲线 Performance Curves

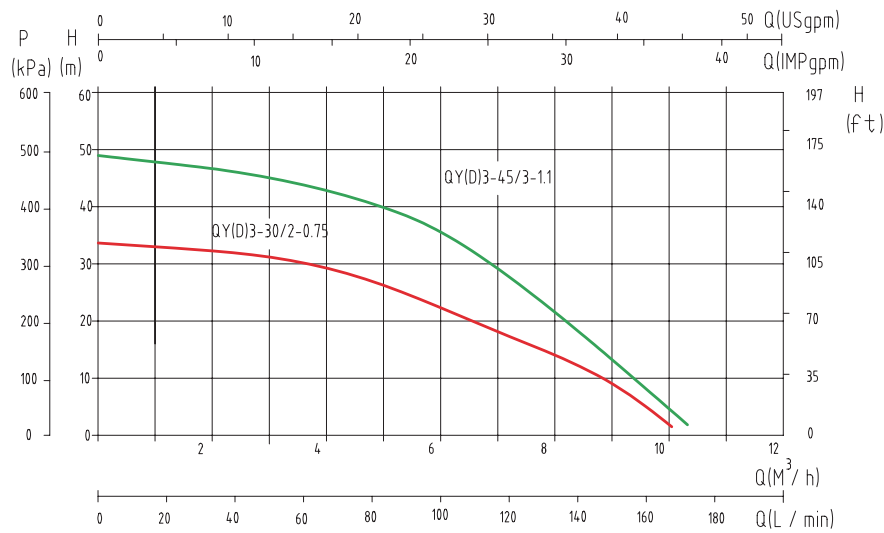


产品技术参数 Performance Data

型号 Model	功率 Power		出水口径 outlet	性能 Performance									
				流量 Flow rate	m³/h	0	1.5	3	4.5	6	7.5	9	10.5
	KW	HP	mm	流量 Flow rate	l/min	0	25	50	75	90	115	140	165
QY(D)3-30/2-0.75	0.75	1	25	扬程 Head	m	33	32.5	31	29.2	24	17	10	1
QY(D)3-45/3-1.1	1.1	1.5	25			48	46.2	45.2	41.6	36	30	14	1.5

外形尺寸 Dimensions Size

型号 Model	外形尺寸 Dimensions Size (cm)			净重 Weight (Kg)
	长 L	宽 W	高 H	
QY(D)3-30/2-0.75	18	18.5	42	18.5
QY(D)3-45/3-1.1	18	18.5	45.5	21

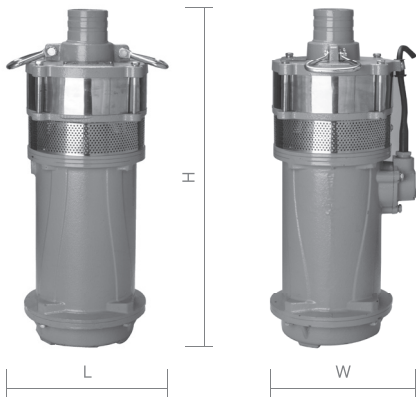

VMP SERIES VIBRATORY PUMPS

VMP 系列振动泵

产品应用 Product Application

家用增压，花园喷淋，增压冲洗
Household pressurization, garden spraying, pressurized flushing

型号说明 Model Instruction



使用条件

- 介质温度: 2-50°C
- 环境温度: 0-40°C
- PH 值: 6.5-8.5
- 潜水深度 < 5 米
- 无砂子无其它固体杂质的一般清水

产品特点

- 铝壳体，橡塑叶轮，45 号轴
- 铝线电机环氧浇灌密封好
- 绝缘等级 E 级
- 防护等级 IPX8


Conditions of Use

- Medium temperature: 2-50° C
- Ambient temperature: 0-40° C
- PH value: 6.5-8.5
- Submersible depth.: < 5m
- General clear water without sand and other solid impurities

Features

- Aluminum housing, rubber and plastic impeller, No. 45 shaft
- Aluminum wire motor epoxy pouring and sealing
- Insulation class Class E
- Protection level IPX8

性能曲线 Performance Curves

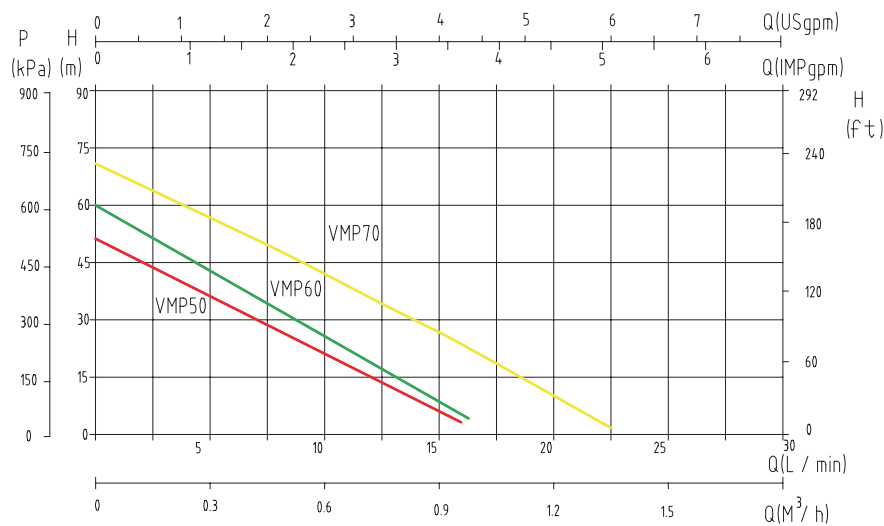


产品技术参数 Performance Data

型号 Model	功率 Power		出水口径 outlet	性能 Performance							
				流量 Flow rate	m³/h	0	0.3	0.6	0.9	1.2	1.5
	KW	HP	inch	流量 Flow rate	l/min	0	5	10	15	20	25
VMP50	0.16	0.21	0.5	扬程 Head	m	50	24	15	4	/	/
VMP60	0.25	0.3	0.5			60	34	26	9	/	/
VMP70	0.3	0.4	1			73	63	47	33	15	0

外形尺寸 Dimensions Size

型号 Model	外形尺寸 Dimensions Size (cm)			净重 Weight (Kg)
	长 L=W	D	高 H	
VMP50	27.5	18	76	2.8
VMP60	27.5	18	10	3
VMP70	31	38	10	4

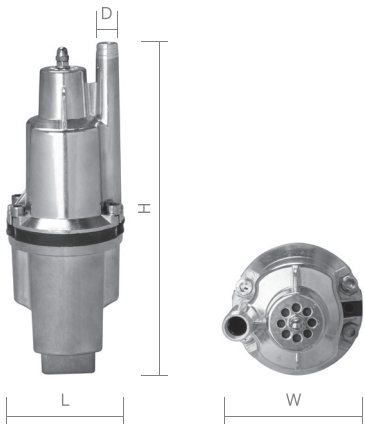


JP SERIES JET PUMPS

JP 系列喷射泵

产品应用 Product Application

家用增压，花园喷淋，增压冲洗
Household pressurization, garden spraying, pressurized flushing

型号说明 Model Instruction

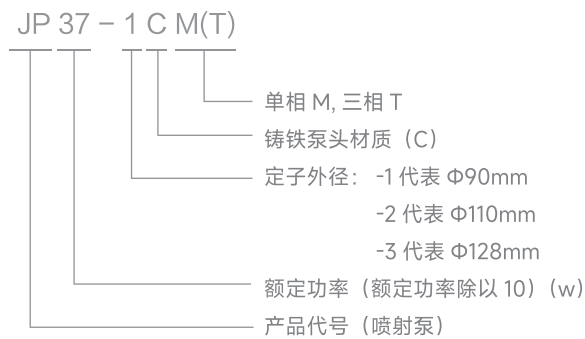

使用条件

- 介质最高温度: 40°C
- 环境温度: $0-40^{\circ}\text{C}$
- PH 值: 6.5-8.5
- 潜水深度 (无)
- 固定体积含量不超过 0.1% 一般清水

产品特点

- 铸铁泵头, 304 不锈钢叶轮, 420 材质轴
- 铜线电机寿命长
- 绝缘等级 F 级
- 防护等级 IPX4
- 机封密封效果好


Conditions of Use

- Maximum temperature of medium: 40°C
- Ambient temperature: $0-40^{\circ}\text{C}$
- PH value: 6.5-8.5
- submersible depth.: (none)
- General clean water with solid volume content not exceeding 0.1%

Features


- Cast iron pump head, 304 stainless steel impeller, 420 material shaft
- Copper wire motor with long lifetime
- Insulation class F
- Ingress protection IPX4
- The sealing effect of the machine seal is good

性能曲线 Performance Curves

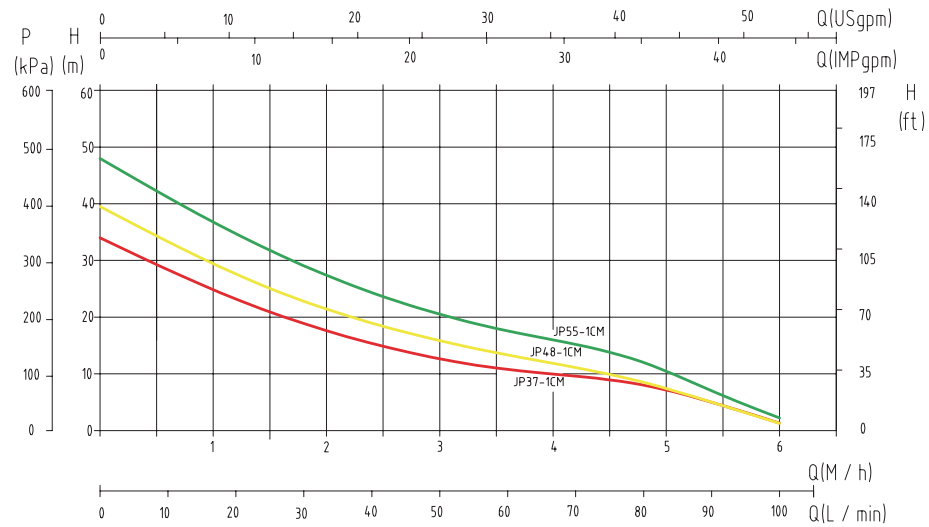

产品技术参数 Performance Data


型号 Model	功率 Power		最大吸程 Maximum suction lift	进出口径 Entrance exit paths	性能 Performance																
					流量 Flow rate	m³/h	0	0.3	0.6	1.2	1.5	1.8	2.4	2.7	3	3.6	4.2	4.8	5.4	6	
	流量 Flow rate	l/min			0	5	10	20	25	30	40	45	50	60	70	80	90	100			
JP37-1CM	0.37	0.5	9	1*1	扬程 Head	m	34	32	29	23.5	21	19	16.5	15	13.2	11	10	8	4	2	
JP48-1CM	0.48	0.65	9	1*1			39.5	36.5	34	28	26	23.5	20	18	16.2	13.5	11	8.5	4	2	
JP55-1CM	0.55	0.75	9	1*1			48	45	40.5	33	29.5	27.5	23	21.5	20	17.9	16	12	5	3	

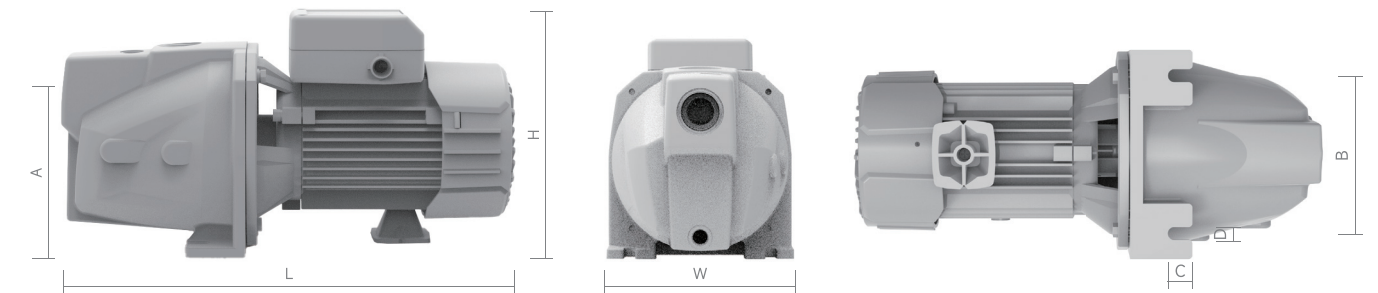

外形尺寸 Dimensions Size

型号 Model	外形尺寸 Dimensions Size (cm)			安装尺寸 Installation Dimensions (mm)			净重 Weight (Kg)
	长 L	宽 W	高 H	A	B	C*D	
JP37-1CM	37.3	16.2	19.1	128	122	16*10	10.5
JP48-1CM	37.3	16.2	19.1	128	122	16*10	11
JP55-1CM	37.3	16.2	19.1	128	122	16*10	11.5

性能曲线 Performance Curves

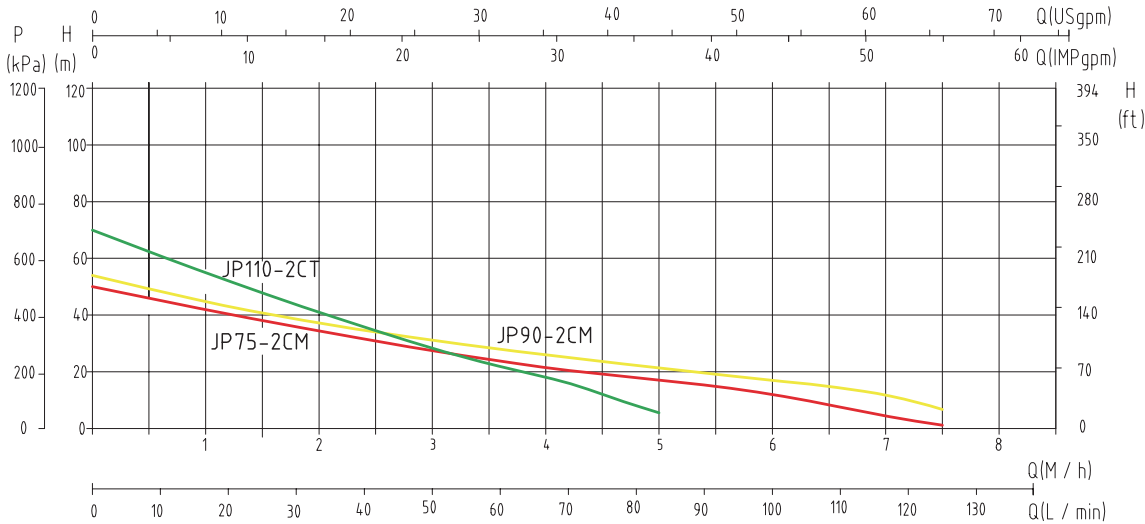

产品技术参数 Performance Data


型号 Model	功率 Power		最大吸程 Maximum suction lift	进出口径 Entrance exit paths	性能 Performance														
					流量 Flow rate	m³/h	0	0.3	0.6	1.2	1.8	2.4	2.7	3	3.6	4.2	4.8	6	7.2
	KW	HP			流量 Flow rate	l/min	0	5	10	20	30	40	45	50	60	70	80	100	120
JP75-2CM	0.75	1	9	1*1	扬程 Head	m	50	48	46	40	35	30.5	28.5	26.5	23	20.5	16	12	3
JP90-2CM	0.9	1.25	9	1*1			54	53	50	44	40.5	36	33	32	28	25	22	17	10
JP110-2CT	1.1	1.5	9	1*1			70	67	61	51.5	43	36	32.5	28	22	16	8	/	/



外形尺寸 Dimensions Size


型号 Model	外形尺寸 Dimensions Size (cm)			安装尺寸 Installation Dimensions (mm)			净重 Weight (Kg)
	长 L	宽 W	高 H	A	B	C*D	
JP75-2CM	40.5	18.8	22.5	156	144	18*10	14.3
JP90-2CM	40.5	18.8	22.5	156	144	18*10	15
JP110-2CT	40.5	18.8	22.5	156	144	18*10	15.2

性能曲线 Performance Curves

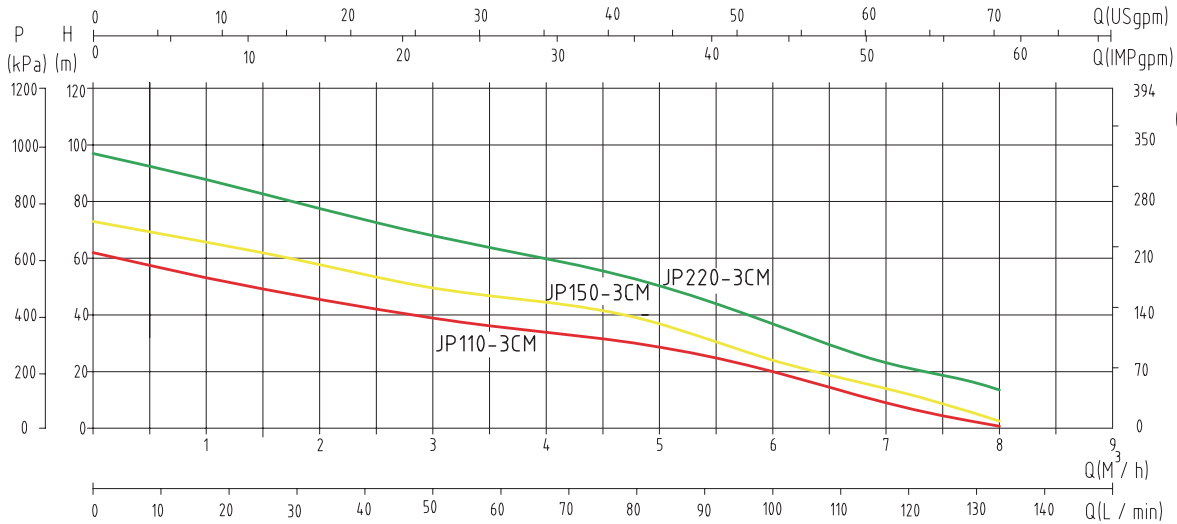

产品技术参数 Performance Data

型号 Model	功率 Power		最大吸程 Maximum suction lift	进出口径 Entrance exit paths	性能 Performance																
					流量 Flow rate	m³/h	0	0.6	1.2	1.8	2.4	3	3.6	4.2	4.8	6	7.2	8.4			
	KW	HP			流量 Flow rate	l/min	0	10	20	30	40	50	60	70	80	100	120	140			
JP110-3CM	1.1	1.5	9	1.25*1	扬程 Head	m	62	56.5	51	46	42	39.5	36	33	30.5	20	7	/			
JP150-3CM	1.5	2	9	1.25*1			73	69	63.5	57.5	53.5	50	44.5	41.5	39	24	12	/			
JP220-3CM	2.2	3	9	1.25*1			97	89	82.5	77	71.5	66	62	57	52.5	33	18	5			

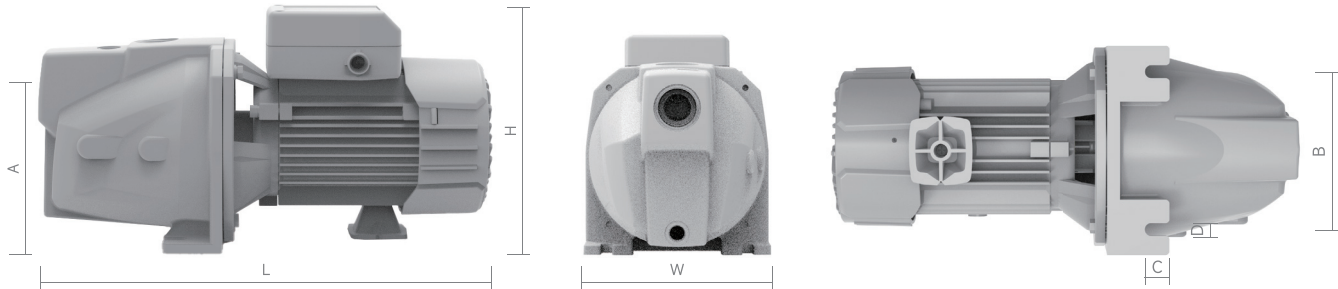

外形尺寸 Dimensions Size

型号 Model	外形尺寸 Dimensions Size (cm)			安装尺寸 Installation Dimensions (mm)			净重 Weight (Kg)
	长 L	宽 W	高 H	A	B	C*D	
JP110-3CM	56	21	25.5	163	160	20*11	26
JP150-3CM	56	21	25.5	163	160	20*11	27.5
JP220-3CM	56	21	25.5	163	160	20*11	29.5


JET SERIES JET PUMPS

JET 系列喷射泵

产品应用 Product Application

园林浇水，家用增压，浅井提水
Watering the garden, pressurizing the home, and lifting water from shallow wells

型号说明 Model Instruction

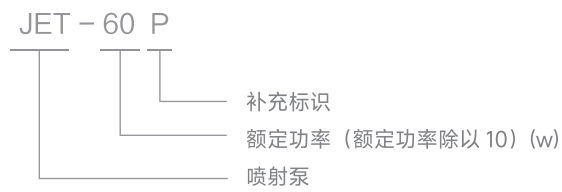

使用条件

- 介质温度：2-50°C
- 环境温度：0-40°C
- PH 值： 6.5-8.5
- 一般清水或固体体积含量不超过 0.1% 清水

产品特点

- 铁壳体，铜叶轮，45# 轴
- 铜线电机寿命长
- 绝缘等级 B 级
- 防护等级 IPX4

Conditions of Use


- Medium temperature: 2-50° C
- Ambient temperature: 0-40° C
- PH value: 6.5-8.5
- Generally, the volume content of clean water or solid should not exceed 0.1% clear water

Features

- Iron shell, copper impeller, 45# shaft
- Copper wire motor with long lifetime
- Insulation class B
- Ingress protection IPX4


JET

性能曲线 Performance Curves

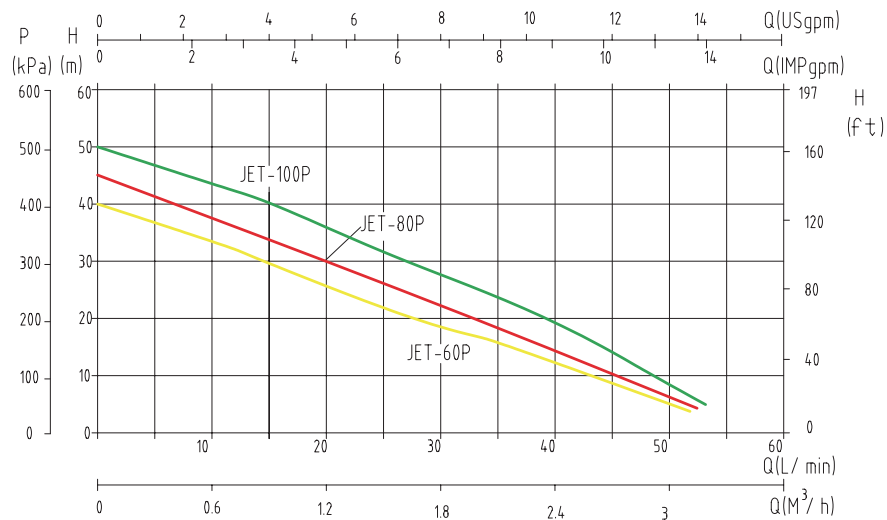

产品技术参数 Performance Data

型号 Model	功率 Power		吸程 Suction lift	进出口径 Entrance exit paths	性能 Performance										
	KW	HP	(m)	inch	流量 Flow rate	m³/h	0	0.42	0.84	1.26	1.68	2.1	2.52	2.94	3.36
					流量 Flow rate	l/min	0	7	14	21	28	35	42	49	56
JET-60P	0.6	0.8	8	1*1	扬程 Head	m	38	36	30	26	22	17.5	9	3	0
JET-80P	0.8	1.1	8	1*1			45	42	35	30	25	19	15	6	0
JET-100P	1	1.35	8	1*1			50	47	42	35	30	25	19	8	0

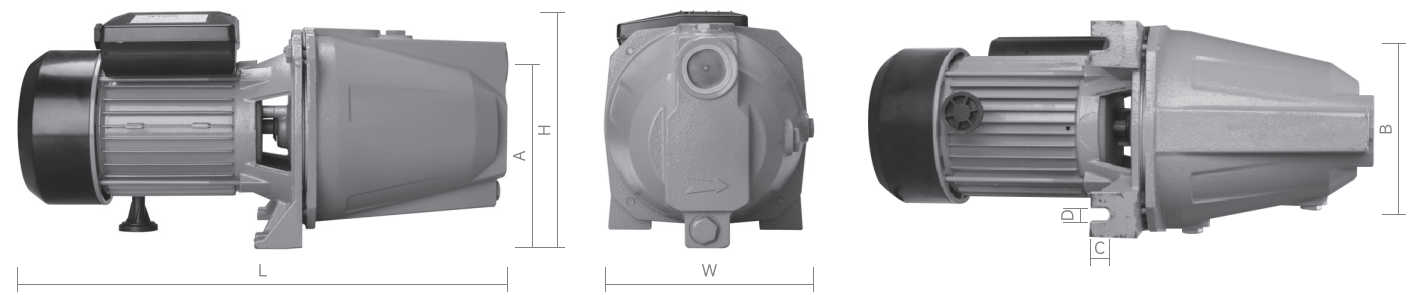

外形尺寸 Dimensions Size

型号 Model	外形尺寸 Dimensions Size (cm)			安装尺寸 Installation Dimensions (mm)			净重 Weight (Kg)
	长 L	宽 W	高 H	A	B	C*D	
JET-60P	43.5	19	20	153	136	16*9.5	12.7
JET-80P	43.5	19	20	153	136	16*9.5	13.5
JET-100P	43.5	19	20	153	136	16*9.5	14


DP SERIES JET PUMPS

DP 系列喷射泵

产品应用 Product Application

园林浇水，家用增压，深井提水
Watering the garden, pressurizing the home, and lifting water from deep wells

型号说明 Model Instruction

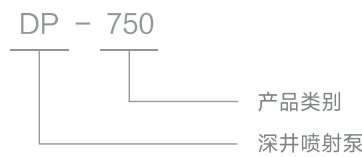

使用条件

- 介质温度：2-50°C
- 环境温度：0-40°C
- PH 值： 6.5-8.5
- 无砂子或无其它固体杂质的一般清水

产品特点

- 铸铁泵体，45 号轴，铜叶轮
- 铜线电机寿命长
- 绝缘等级 B 级
- 防护等级 IPX4
- 高吸程


Conditions of Use

- Medium temperature: 2-50° C
- Ambient temperature: 0-40° C
- PH value: 6.5-8.5
- General clear water without sand or other solid impurities

Features


- Cast iron pump body, No. 45 shaft, copper impeller
- Copper wire motor with long lifetime
- Insulation class B
- Ingress protection IPX4
- High suction lift

性能曲线 Performance Curves

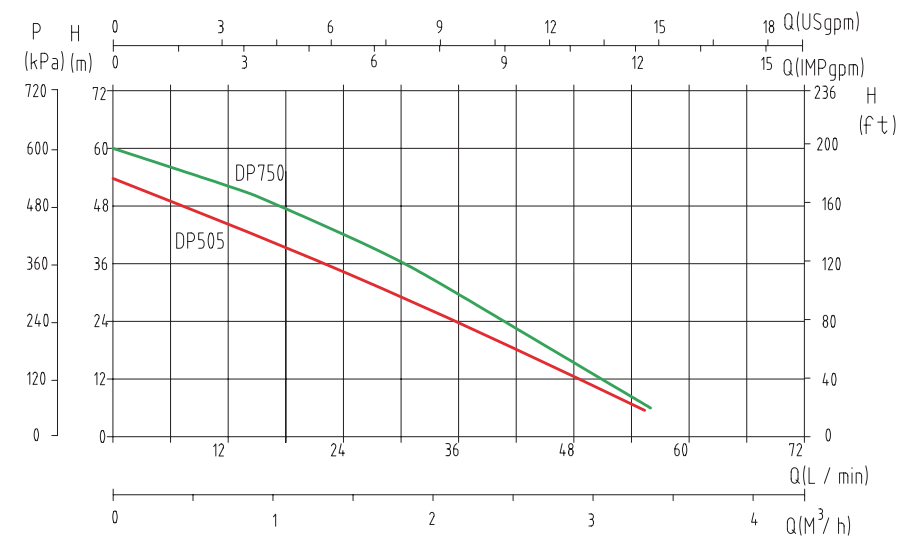

产品技术参数 Performance Data

型号 Model	功率 Power		吸程 Suction lift	进出口径 Entrance exit paths	性能 Performance								
	KW	HP	(m)	inch	流量 Flow rate	m³/h	0	0.6	1.2	1.8	2.4	3	3.6
					流量 Flow rate	l/min	0	10	20	30	40	50	60
DP505	1.1	1.5	30	1.25*1*1	扬程 Head	m	55	43	38	28	19	6	0
DP750	1.5	2	35	1.25*1*1			60	50	45	36	23	12	0

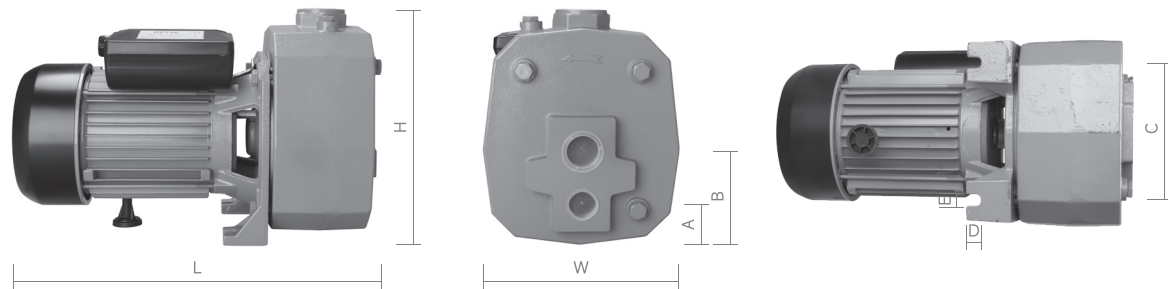

外形尺寸 Dimensions Size

型号 Model	外形尺寸 Dimensions Size (cm)			安装尺寸 Installation Dimensions (mm)				净重 Weight (Kg)
	长 L	宽 W	高 H	A	B	C	D*E	
DP505	40	21	25.5	55	112	144	15*11.5	20
DP750	40	21	25.5	55	112	144	15*11.5	24

QB SERIES VORTEX WATER PUMP

QB 系列旋涡水泵

产品应用 Product Application

园林浇水，家用增压，浅井提水
Watering the garden, pressurizing the home, and lifting water from shallow wells

型号说明 Model Instruction

QB - 60

叶轮直径 (mm)

QB 花园泵



使用条件

- 介质温度：2-50°C
- 环境温度：0-40°C
- PH 值： 6.5-8.5
- 无砂子或无其它固体颗粒的一般清水

产品特点

- 铁壳体，铜叶轮，304 不锈钢嵌件，45# 轴
- 铜线电机寿命长
- 绝缘等级 B 级
- 防护等级 IPX4
- 体积小，重量轻


Conditions of Use

- Medium temperature: 2-50° C
- Ambient temperature: 0-40° C
- PH value: 6.5-8.5
- General clear water without sand or other solid particles

Features


- Iron housing, copper impeller, 304 stainless steel inserts, 45# shaft
- Copper wire motor with long lifetime
- Insulation class B
- Ingress protection IPX4
- Small size and light weight

性能曲线 Performance Curves

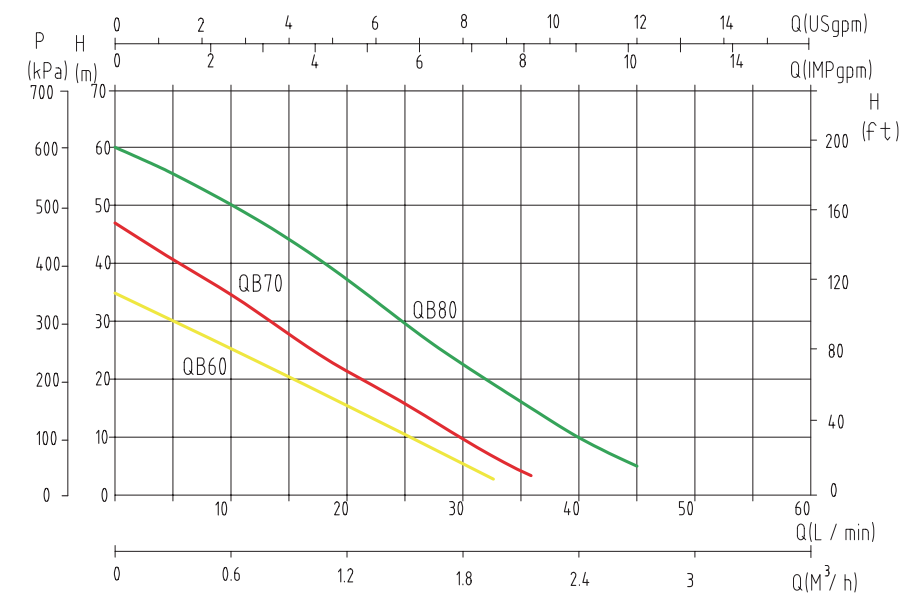

产品技术参数 Performance Data

型号 Model	功率 Power		吸程 Suction lift	进出口径 Entrance exit paths	性能 Performance											
	KW	HP			(m)	inch	流量 Flow rate	m³/h	0	0.42	0.84	1.26	1.68	2.1	2.52	2.94
							流量 Flow rate	l/min	0	7	14	21	28	35	42	49
QB60	0.37	0.5	8	1x1	扬程 Head	m	35	29	20	14	10	0	/	/		
QB70	0.55	0.75	8	1x1			48	39	31	21	11	4	0	/		
QB80	0.75	1	8	1x1			60	54	44	33	26	14	6	0		

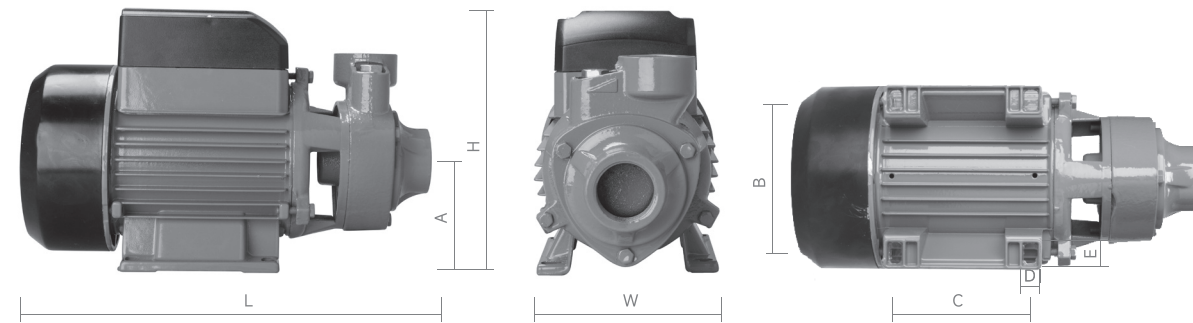

外形尺寸 Dimensions Size

型号 Model	外形尺寸 Dimensions Size (cm)			安装尺寸 Installation Dimensions (mm)				净重 Weight (Kg)
	长 L	宽 W	高 H	A	B	C	D*E	
QB60	26	12	15	65	95	82	8.5*12	4.6
QB70	30	14	18	73	106	90	7*9.5	8.8
QB80	30	14	18	73	106	90	7*9.5	9.5

1WZB SERIES VORTEX WATER PUMP

1WZB 系列旋涡自吸泵

产品应用 Product Application

园林浇水，家用增压，浅井提水

Watering the garden, pressurizing the home, and lifting water from shallow wells

型号说明 Model Instruction



使用条件

- 介质温度: 2-50°C
- 环境温度: 0-40°C
- PH 值: 6.5-8.5
- 无砂子或无其它固体颗粒的一般清水

产品特点

- 铁壳体，铜叶轮，304 不锈钢嵌件，45# 轴
- 铜线电机寿命长
- 绝缘等级 B 级
- 防护等级 IPX4


Conditions of Use

- Medium temperature: 2-50° C
- Ambient temperature: 0-40° C
- PH value: 6.5-8.5
- General clear water without sand or other solid particles

Features


- Iron housing, copper impeller, 304 stainless steel inserts, 45# shaft
- Copper wire motor with long lifetime
- Insulation class B
- Ingress protection IPX4

性能曲线 Performance Curves

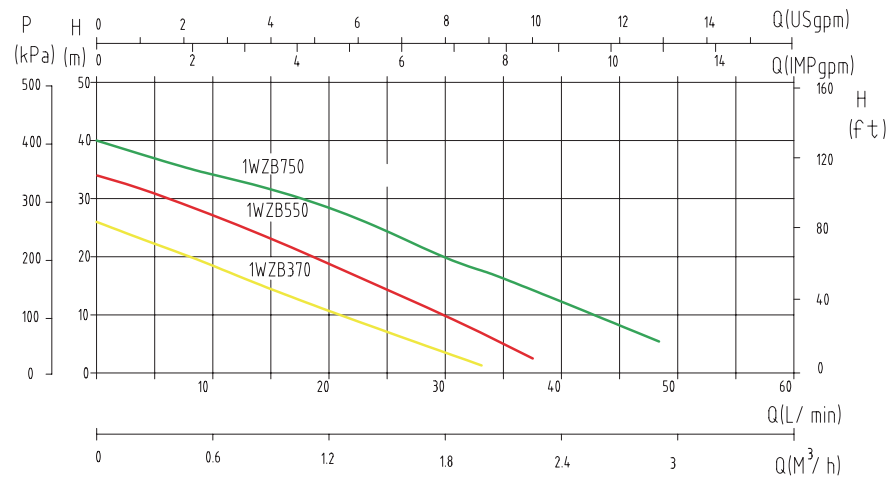

产品技术参数 Performance Data

型号 Model	功率 Power		吸程 Suction lift	进出口径 Entrance exit paths	性能 Performance										
					流量 Flow rate	m³/h	0	0.42	0.84	1.26	1.68	2.1	2.52	2.94	3.36
	KW	HP			流量 Flow rate	l/min	0	7	14	21	28	35	42	49	56
1WZB370	0.37	0.5	8	1*1	扬程 Head	m	26	21	14	10	4	0	/	/	/
1WZB550	0.55	0.75	8	1*1			33	29	24	18	10	5	0	/	/
1WZB750	0.75	1	8	1*1			40	35	33	28	21	16	10	4	0

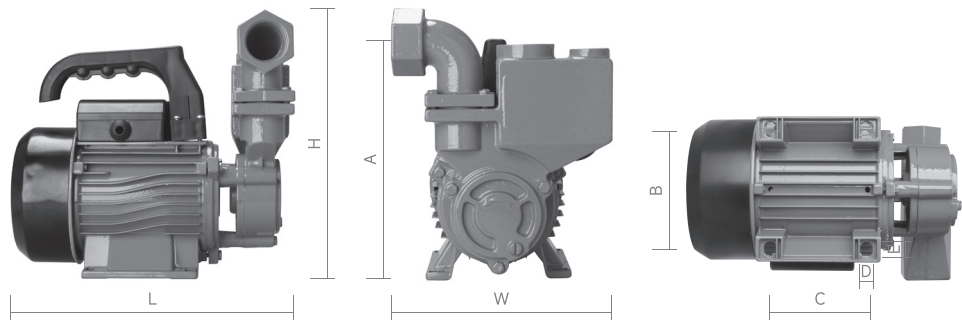

外形尺寸 Dimensions Size

型号 Model	外形尺寸 Dimensions Size (cm)			安装尺寸 Installation Dimensions (mm)				净重 Weight (Kg)
	长 L	宽 W	高 H	A	B	C	D*E	
1WZB370	23.5	16.5	21.5	190	99	82	7.5*12.5	5.6
1WZB550	26.5	17	23.5	209	110	88	11*14	8
1WZB750	26.5	17	23.5	209	110	88	11*14	9.5

AWUT SERIES VORTEX WATER PUMP

AWUT 系列旋涡自动自吸泵

产品应用 Product Application

园林浇水，家用增压，浅井提水
Watering the garden, pressurizing the home, and lifting water from shallow wells

型号说明 Model Instruction

AWUT – 125

额定功率 (W)

自动自吸泵



使用条件

- 介质温度：2-50°C
- 环境温度：0-40°C
- PH 值： 6.5-8.5
- 无砂子或无其它固体颗粒的一般清水

产品特点

- 铁壳体，铜叶轮，304 不锈钢嵌件，45# 轴
- 铜线电机寿命长
- 绝缘等级 B 级
- 防护等级 IPX4
- 流量开关，压力开关自动开停机


Conditions of Use

- Medium temperature: 2-50° C
- Ambient temperature: 0-40° C
- PH value: 6.5-8.5
- Plain clear water without sand or other solid particles

Features


- Iron housing, copper impeller, 304 stainless steel inserts, 45# shaft
- Copper wire motor with long lifetime
- Insulation class B
- Protection class IPX4
- Flow switch and pressure switch automatically start and stop

性能曲线 Performance Curves

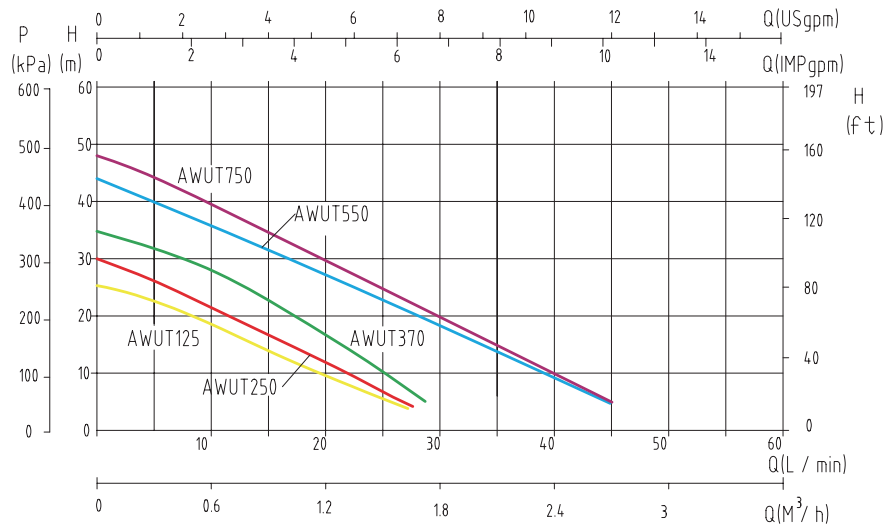

产品技术参数 Performance Data

型号 Model	功率 Power		吸程 Suction lift	进出口径 Entrance exit paths	性能 Performance											
					流量 Flow rate	m³/h	0	0.36	0.72	1.08	1.44	1.8	2.16	2.52	2.88	
	KW	HP	(m)	inch	流量 Flow rate	l/min	0	6	12	18	24	30	36	42	48	
AWUT-125	0.125	0.17	8	1*1	扬程 Head	m	25	21	16	12	6	1.5	/	/	/	
AWUT-250	0.25	0.33	8	1*1			30	26	20	14.5	8	2	/	/	/	
AWUT-370	0.37	0.5	8	1*1			35	32	26	19	11	3	/	/	/	
AWUT-550	0.55	0.75	8	1*1			45	39	32	27	22	18	12	5	1	
AWUT-750	0.75	1	8	1*1			48	43	35	29	24	20	13	6	1	

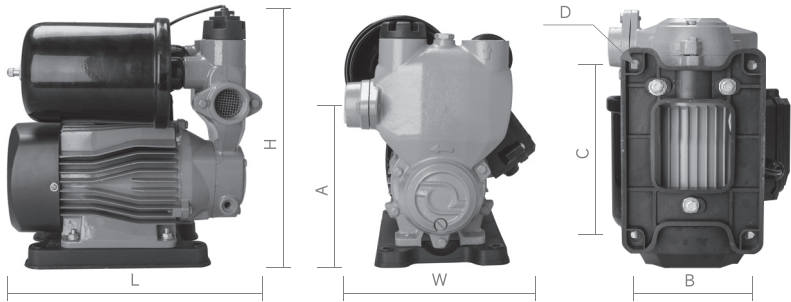

外形尺寸 Dimensions Size

型号 Model	外形尺寸 Dimensions Size (cm)			安装尺寸 Installation Dimensions (mm)				净重 Weight (Kg)
	长 L	宽 W	高 H	A	B	C	D	
AWUT-125	26.5	20	24.5	160	109	161.5	8.5	8.3
AWUT-250	26.5	20	24.5	160	109	161.5	8.5	8.5
AWUT-370	26.5	20	24.5	160	109	161.5	8.5	8.8
AWUT-550	28	21	27.5	190	131	189	8.5	12
AWUT-750	28	21	27.5	190	131	189	8.5	12.5

CPM SERIES CENTRIFUGAL GARDEN PUMP

CPM 系列离心花园泵

产品应用 Product Application

园林浇水，水箱送水，家用增压
Watering in the garden, water delivery in the tank, pressurization in the home

型号说明 Model Instruction

CPM - 130

叶轮直径 (mm)
离心花园泵



使用条件

- 介质温度: 2-50°C
- 环境温度: 0-40°C
- PH 值: 6.5-8.5
- 一般清水或固体体积含量不超过 0.1% 清水

产品特点

- 铁壳体，铜叶轮，45# 轴
- 铜线电机寿命长
- 绝缘等级 B 级
- 防护等级 IPX4

Conditions of Use


- Medium temperature: 2-50° C
- Ambient temperature: 0-40° C
- PH value: 6.5-8.5
- Generally, the volume content of clean water or solid should not exceed 0.1% clear water

Features

- Iron shell, copper impeller, 45# shaft
- Copper wire motor with long lifetime
- Insulation class B
- Ingress protection IPX4


CPM

性能曲线 Performance Curves

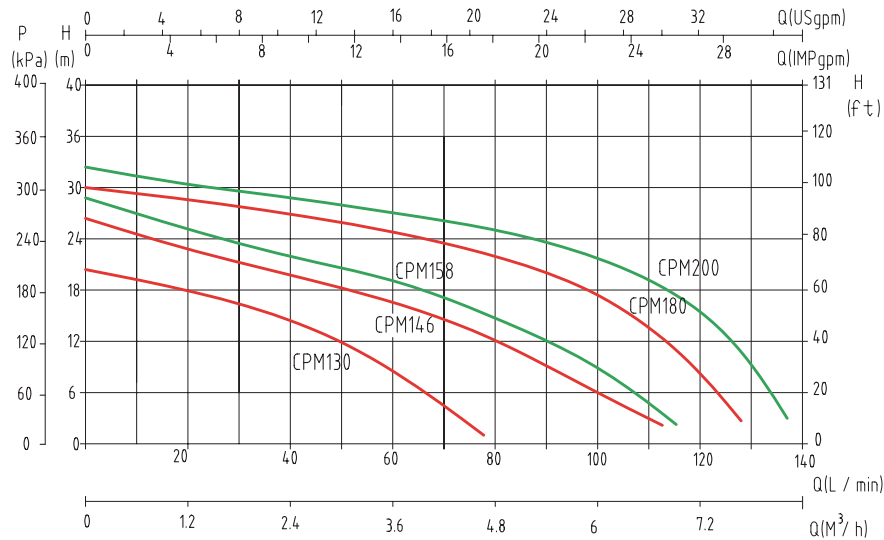

产品技术参数 Performance Data

型号 Model	功率 Power		进出口径 Entrance exit paths	性能 Performance									
				流量 Flow rate	m³/h	0	1.2	2.4	3.6	4.8	6	7.2	8.4
	KW	HP		流量 Flow rate	l/min	0	20	40	60	80	100	120	140
CPM-130	0.37	0.5	1*1	扬程 Head	m	20	18	14	8	0	/	/	/
CPM-146	0.55	0.75	1*1			26	22	19	17	14	5	0	/
CPM-158	0.75	1	1*1			28	23	22	19.5	18	12	0	/
CPM-180	1.1	1.5	1*1			30	27.5	26	24.5	21	16	9	0
CPM-200	1.5	2	1*1			32	30	28.5	26.5	25	21.5	16	0

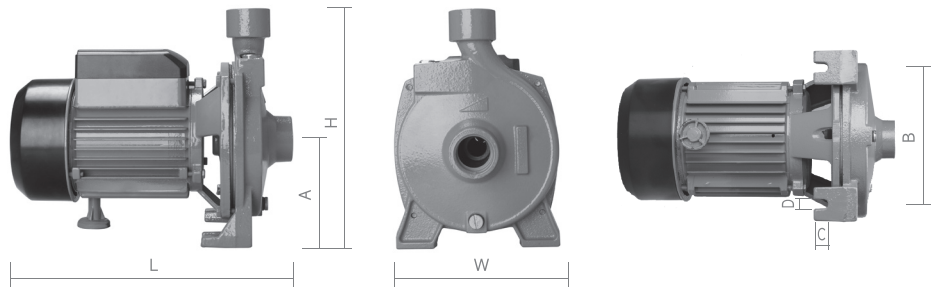

外形尺寸 Dimensions Size

型号 Model	外形尺寸 Dimensions Size (cm)			安装尺寸 Installation Dimensions (mm)			净重 Weight (Kg)
	长 L	宽 W	高 H	A	B	C*D	
CPM-130	26	15.5	22	87	124.5	13*9.5	8
CPM-146	26	15.5	22	98	142	13*9.5	12
CPM-158	30	18.5	23	98	142	13*9.5	13
CPM-180	35.5	20.5	25.5	107	159	14.5*8.5	20
CPM-200	35.5	20.5	25.5	107	159	14.5*8.5	21

CPS SERIES CENTRIFUGAL GARDEN PUMP

CPS 系列离心花园泵

产品应用 Product Application

食品化工，生活污水，家用增压
Food chemical industry, domestic sewage, household pressurization

型号说明 Model Instruction

CPS - 130

叶轮直径 (mm)
不锈钢离心花园泵



使用条件

- 介质温度：2-50°C
- 环境温度：0-40°C
- PH 值：4-10
- 无化学腐蚀和不含研磨颗粒的化学液体或清水

产品特点

- 304 泵体，304 焊接轴，304 不锈钢轮
- 铜线电机寿命长
- 绝缘等级 B 级
- 防护等级 IPX4
- 耐腐蚀耐锈


Conditions of Use

- Medium temperature: 2-50° C
- Ambient temperature: 0-40° C
- PH value: 4-10
- No chemical corrosion and no abrasive particles of chemical liquid or water

Features


- 304 pump body, 304 welded shaft, 304 stainless steel wheel
- Copper wire motor with long lifetime
- Insulation class B
- Ingress protection IPX4
- Corrosion and rust resistance

性能曲线 Performance Curves

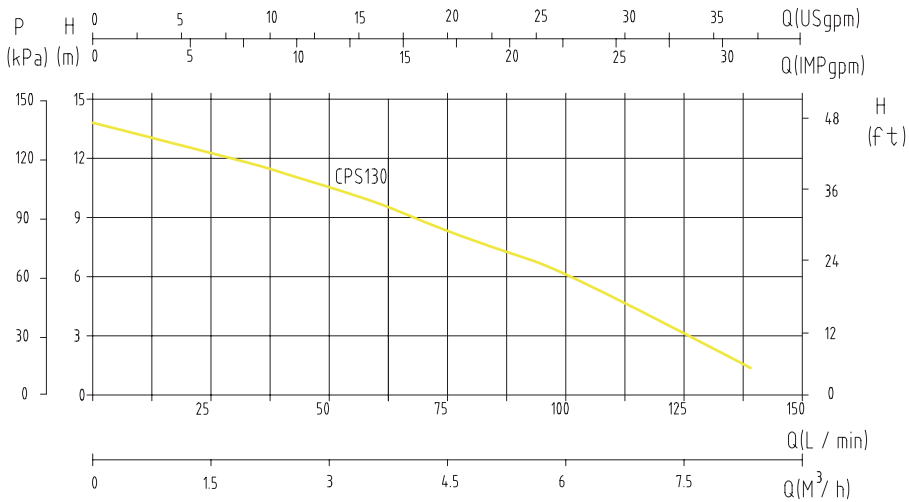

产品技术参数 Performance Data

型号 Model	功率 Power		进出口径 Entrance exit paths	性能 Performance									
	KW	HP		inch	流量 Flow rate	m³/h	0	1.5	3	4.5	6	7.5	9
					流量 Flow rate	l/min	0	25	50	75	100	125	150
CPS130	0.37	0.5	1.25*1.25	扬程 Head	m	14	12	10.5	8	6	3.5	0	

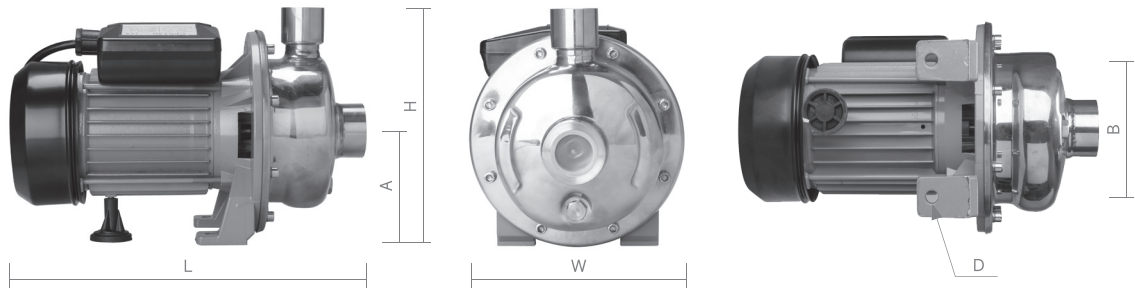

外形尺寸 Dimensions Size

型号 Model	外形尺寸 Dimensions Size (cm)			安装尺寸 Installation Dimensions (mm)			净重 Weight (Kg)
	长 L	宽 W	高 H	A	B	D	
CPS130	29.5	17.5	19	84	100	9	6


HF SERIES CENTRIFUGAL PUMP

HF 系列离心泵

产品应用 Product Application

农林灌溉，河流，水库，水箱送水
Agroforestry irrigation, rivers, reservoirs, water tanks to deliver water

型号说明 Model Instruction



使用条件

- 介质温度：2-50°C
- 环境温度：0-40°C
- PH 值： 6.5-8.5
- 一般清水或固体体积含量不超过 0.1% 清水

产品特点

- 铁壳体，铜叶轮，45# 轴
- 铜线电机寿命长
- 绝缘等级 B 级
- 防护等级 IPX4


Conditions of Use

- Medium temperature: 2-50° C
- Ambient temperature: 0-40° C
- PH value: 6.5-8.5
- Generally, the volume content of clean water or solid should not exceed 0.1% clear water

Features


- Iron shell, copper impeller, 45# shaft
- Copper wire motor with long lifetime
- Insulation class B
- Ingress protection IPX4

性能曲线 Performance Curves

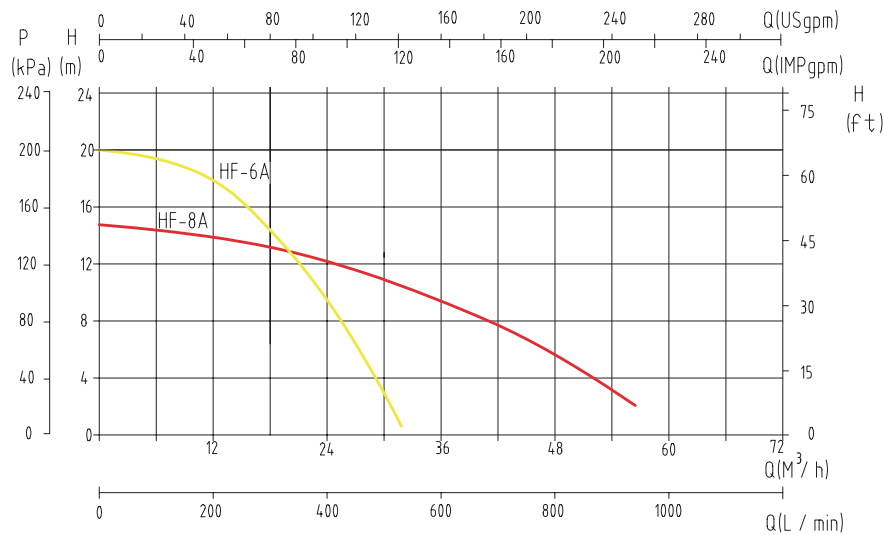

产品技术参数 Performance Data

型号 Model	功率 Power		进出口径 Entrance exit paths	性能 Performance										
				流量 Flow rate	m³/h	0	7.5	15	22.5	30	37.5	45	52.5	60
	KW	HP	inch	流量 Flow rate	l/min	0	125	250	375	500	625	750	875	1000
HF-6A	1.1	1.5	2*2	扬程 Head	m	20	19	16	10.5	2.5	/	/	/	/
HF-8A	2.2	3	3*3			15	14.2	13.5	12.5	10.5	8.5	6.4	3	0

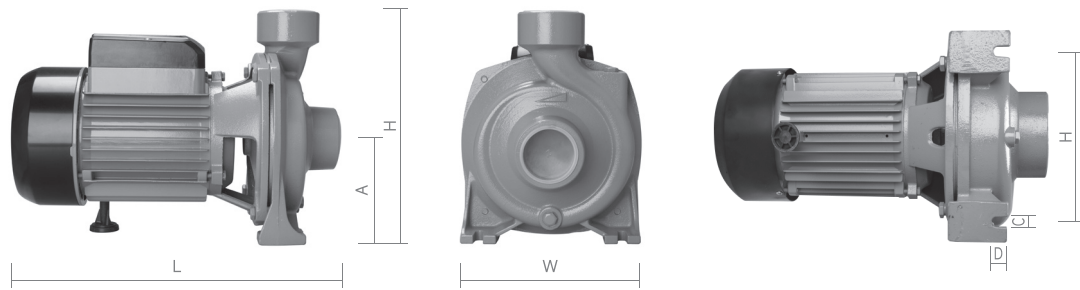

外形尺寸 Dimensions Size

型号 Model	外形尺寸 Dimensions Size (cm)			安装尺寸 Installation Dimensions (mm)			净重 Weight (Kg)
	长 L	宽 W	高 H	A	B	C*D	
HF-6A	37.5	21	26.5	110	161.5	9*17.5	20.5
HF-8A	43.5	24.5	31	118	188	11*19	27.5

WP SERIES GASOLINE ENGINE PUMP

WP 系列汽油机抽水泵

WP

产品应用 Product Application

抗洪排涝，农林灌溉，排涝，池塘抽水

Flood control and drainage, agroforestry irrigation, drainage, pond pumping

型号说明 Model Instruction

WP - 30

泵进口直径（泵进口直径 10 倍
整值表示）（inch）

汽油机抽水泵



使用条件

- 燃料：92# 无铅汽油
- 介质温度：2-50°C
- 环境温度：-10- 50°C
- PH 值： 6.5-8.5
- 一般清水或固体体积含量不超过 0.1% 清水

产品特点

- 塑料拉柄，铝合金泵体，铁叶轮
- 汽油发动机
- 单缸 4 冲程或 2 冲程电机
- 手动启动


Conditions of Use

- Fuel: 92# unleaded petrol
- Medium temperature: 2-50° C
- Ambient temperature: -10-50° C
- PH value: 6.5-8.5
- Generally, the volume content of clean water or solid should not exceed 0.1% clear water

Features


- Plastic handle, aluminum alloy pump body, iron impeller
- Gasoline engine
- Single-cylinder 4-stroke or 2-stroke motor
- Manual start

性能曲线 Performance Curves

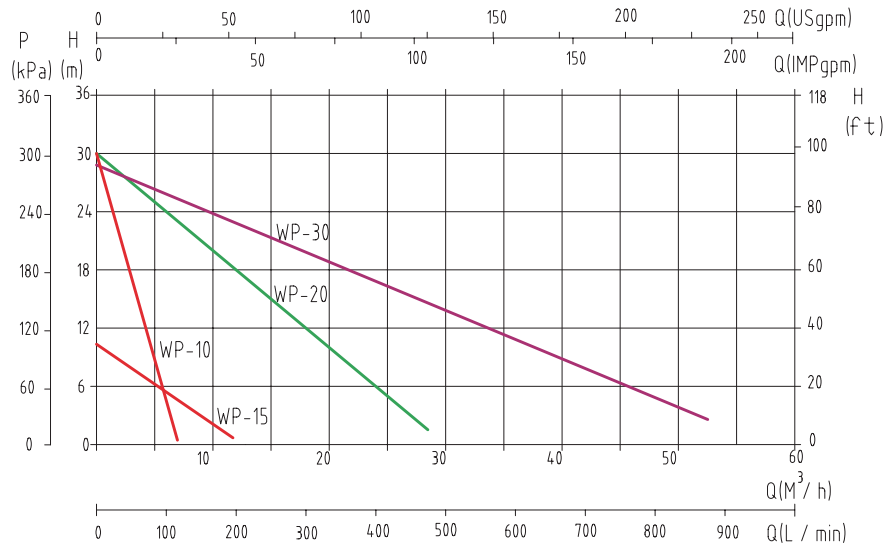

产品技术参数 Performance Data

型号 Model	机油容量 Oil capacity	功率 power	流量 flow rate	扬程 Head	吸程 Suction lift	发动机型号 Engine model	缸径*行程 Bore*Stroke	燃油型号 Fuel type	润滑油型号 Lubricating oil type	启动方式 Startup mode	进出口直径 Inlet and outlet diameters
	L	KW	m3/h	m	m		mm				inch
WP-30	0.6	5.2	58	28	8	170F	70*55单缸、风冷、四冲程 OHV	92 无铅汽油	4 冲程	手动	G3"
WP-20	0.6	4.8	30	30	8	168F	68*54 单缸、风冷、四冲程 OHV	92 无铅汽油	4 冲程	手动	G2"
WP-15	0.36	1.8	12	10	5	154F	54*46 单缸、风冷、四冲程 OHV	92 无铅汽油	4 冲程	手动	G1.5"
WP-10	无机油箱 1.2L 汽油箱	1.1	6.5	30	8	1E40F-5	40*34 单缸、风冷、二冲程	无机油箱，汽油与机油混合比例 25:1	2 冲程	手动	G1"

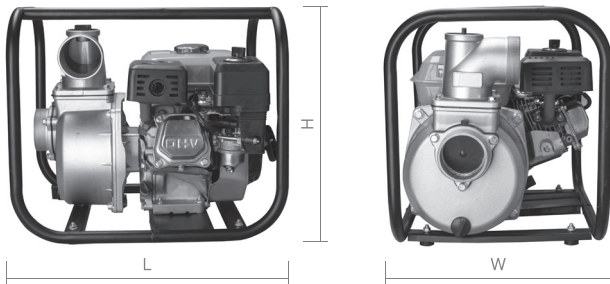

外形尺寸 Dimensions Size

型号 Model	外形尺寸 Dimensions Size (cm)			净重 Weight (Kg)
	长 L	宽 W	高 H	
WP-30	49	37	43	22
WP-20	47	37.5	39	19
WP-15	34.5	29.5	35	9.5
WP-10	39	29.5	34	7

DWP SERIES DIESEL WATER PUMP

DWP 柴油抽水泵

产品应用 Product Application

抗洪排涝，农林灌溉，排涝，池塘抽水
Flood control and drainage, agroforestry irrigation, drainage, pond pumping

型号说明 Model Instruction

DWP - 30

泵进口直径（泵进口直径 10 倍
整值表示）（inch）

柴油机抽水泵



使用条件

- 燃料：0# 柴油
- 介质温度：2-50°C
- 环境温度：-5- 50°C
- PH 值： 6.5-8.5
- 一般清水或固体体积含量不超过 0.1% 清水

产品特点

- 塑料拉柄，铝合金泵体，铁叶轮
- 发动机型号 178F
- 单缸 4 冲程风冷柴油机
- 缸径 78X62mm
- 手动启动


Conditions of Use

- Fuel: 0# diesel
- Medium temperature: 2-50° C
- Ambient temperature: -5- 50° C
- PH value: 6.5-8.5
- Generally, the volume content of clean water or solid should not exceed 0.1% clear water

Features


- Plastic handle, aluminum alloy pump body, iron impeller
- Engine model 178F
- Single-cylinder 4-stroke air-cooled diesel engine
- Bore: 78X62mm
- Manual start

性能曲线 Performance Curves

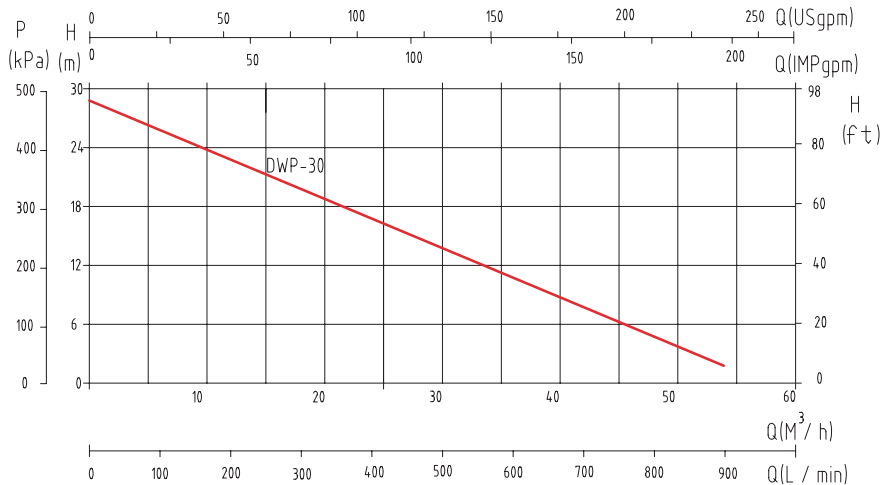

产品技术参数 Performance Data

型号 Model	机油容量 Oil capacity	功率 power	流量 flow rate	扬程 Head	吸程 Suction lift	发动机型号 Engine model	缸径 * 行程 Bore*Stroke	燃油型号 Fuel type	润滑油型号 Lubricating oil type	启动方式 Startup mode	进出口直径 Inlet and outlet diameters
	L	KW	m3/h	m	m		mm				inch
DWP-30	1.1	5.2	52	28	8	178F	78*62	0# 柴油	4 冲程	手动	G3"

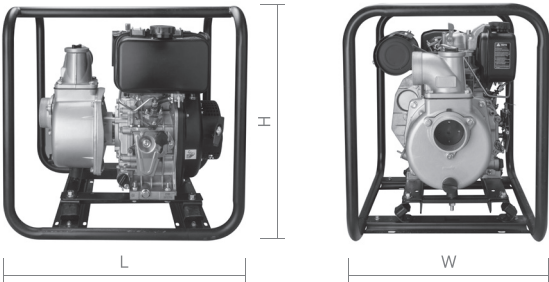

外形尺寸 Dimensions Size

型号 Model	外形尺寸 Dimensions Size (cm)			净重 Weight (Kg)
	长 L	宽 W	高 H	
DWP-30	60	47	59	44.5

ZY SERIES INTELLIGENT INVERTER PUMP

ZY 系列智能变频泵

产品应用 Product Application

全屋增压，适用出水不稳定及水压低的住房
Whole house pressurization, suitable for housing with unstable water outlet and low water pressure

型号说明 Model Instruction



使用条件

- 介质温度：2-60°C
- 环境温度：0-40°C
- PH 值： 6.5-8.5
- 无砂子或无其它固体杂质的一般清水

产品特点

- ABS 外壳，塑料叶轮，塑料泵体，420 轴
- 铜线电机寿命长
- 绝缘等级 F 级
- 防护等级 IPX4
- 工作压力可调节
- 低噪音更安静


Conditions of Use

- Medium temperature: 2-50° C
- Ambient temperature: 0-40° C
- PH value: 6.5-8.5
- General clear water without sand or other solid particles

Features

- ABS housing, plastic impeller, plastic pump body, 420 shaft
- Copper wire motor with long lifetime
- Insulation class F
- Ingress protection IPX4
- The working pressure is adjustable
- Low noise and quieter

性能曲线 Performance Curves

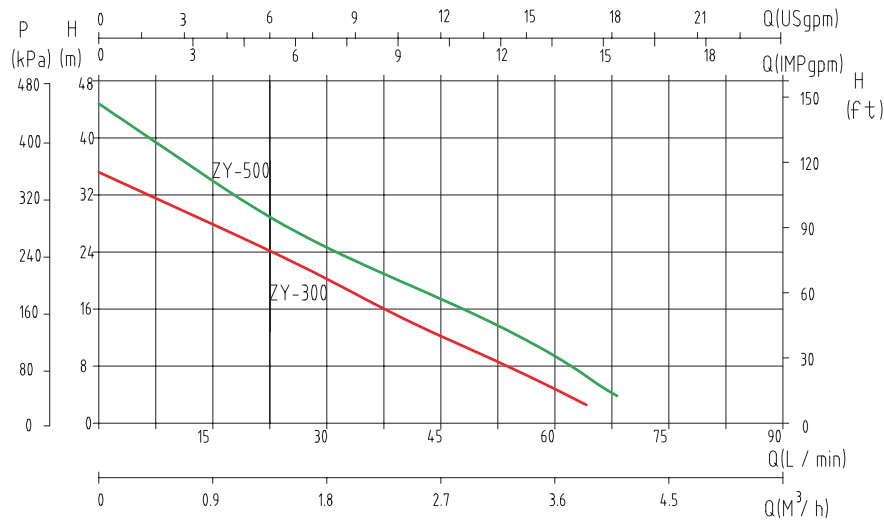

产品技术参数 Performance Data

型号 Model	功率 Power		吸程 Suction lift	进出口径 Entrance exit paths	性能 Performance												
					流量 Flow rate	m³/h	0	0.6	1.2	1.8	2.4	3	3.6	4.2	4.8		
	KW	HP			流量 Flow rate	l/min	0	10	20	30	40	50	60	70	80		
ZY-300	0.3	0.4	5	1*1	扬程 Head	m	34	29	25	19	13	10	5.5	0	/		
ZY-500	0.5	0.7	8	1*1			45	35	29	24	18	15	11	1.7	0		



外形尺寸 Dimensions Size

型号 Model	外形尺寸 Dimensions Size (cm)			安装尺寸 Installation Dimensions (mm)		净重 Weight (Kg)
	长 L	宽 W	高 H	A	B	
ZY-300	28	17	24	155	240	4.6
ZY-500	32	19	28	210	280	5.7

RS SERIES SHIELDED PUMPS

RS 系列屏蔽泵

产品应用 Product Application

管道增压，热水循环
Pipes are pressurized and hot water is circulated

型号说明 Model Instruction



使用条件

- 介质温度: 2-90°C
- 环境温度: 0-40°C
- PH 值: 6.5-8.5
- 无砂子或无其它固体杂质的一般清水

产品特点

- 铝壳，耐高温塑料叶轮，铁泵体，陶瓷轴
- 铜线电机寿命长
- 绝缘等级 F 级
- 防护等级 IPX4
- 工作压力可调节
- 超低噪音更安静


Conditions of Use

- Medium temperature: 2-90° C
- Ambient temperature: 0-40° C
- PH value: 6.5-8.5
- General clear water without sand or other solid impurities

Features


- Aluminum shell, high temperature resistant plastic impeller, iron pump body, ceramic shaft
- Copper wire motor with long lifetime
- Insulation class Class F
- Ingress protection IPX4
- The working pressure is adjustable
- Ultra-low noise and quieter

性能曲线 Performance Curves

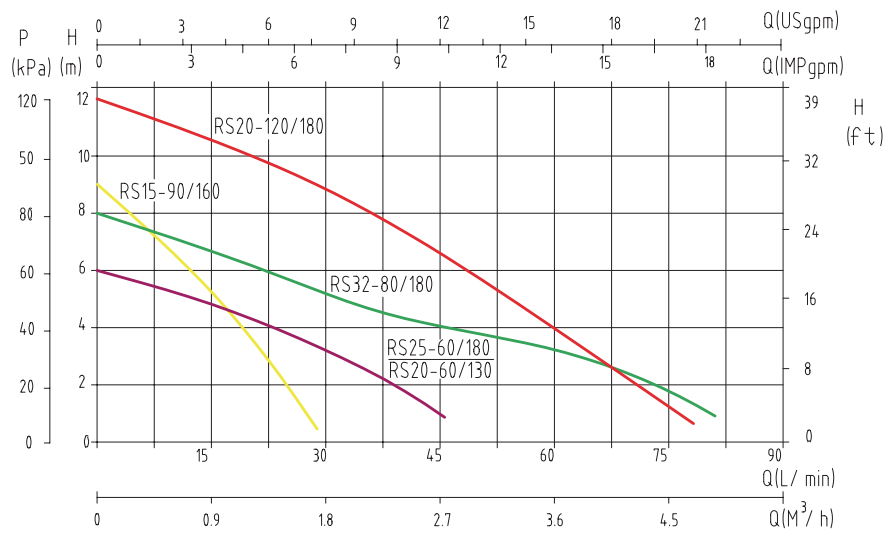

产品技术参数 Performance Data

型号 Model	功率 Power		进出口径 Entrance exit paths	性能 Performance											
				流量 Flow rate	m³/h	0	0.3	0.6	0.9	1.2	1.5	1.8	2.1	2.4	
	KW	HP	inch	流量 Flow rate	l/min	0	5	10	15	20	25	30	35	40	
RS15-90/160	0.1	0.13	0.75*0.75	扬程 Head	m	9	7.8	6.4	5.2	3.5	1.6	/	/	/	
RS20-60/130	0.1	0.13	1*1			6	5.6	5.2	4.8	4.2	3.8	3.2	2.7	2.2	
型号 Model	功率 Power		进出口径 Entrance exit paths	性能 Performance											
				流量 Flow rate	m³/h	0	0.6	1.2	1.8	2.4	3	3.6	4.2	4.8	
	KW	HP	inch	流量 Flow rate	l/min	0	10	20	30	40	50	60	70	80	
RS25-60/180	0.1	0.13	1.5*1.5	扬程 Head	m	6	4.9	4	3.5	2.5	1.9	/	/	/	
RS32-80/180	0.27	0.37	2*2			8	6.8	6.3	5.5	4.8	4	3.5	2.5	1.5	
RS20-120/180	0.285	0.39	1*1			12	11	10	9	6.7	5	4	/	/	

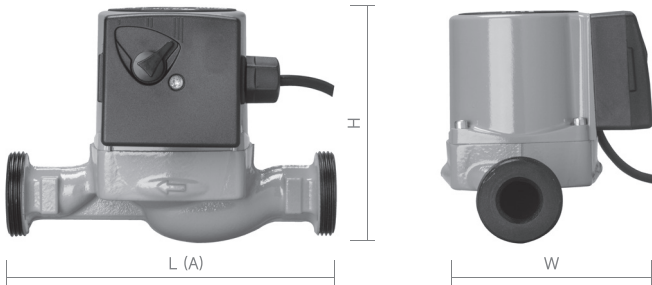

外形尺寸 Dimensions Size

型号 Model	外形尺寸 Dimensions Size (cm)			安装尺寸 Installation Dimensions (mm)	净重 Weight (Kg)
	长 L	宽 W	高 H	A	
RS15-90/160	16	11.5	13.5	160	2.8
RS20-60/130	13	12.6	12.7	130	2.6
RS25-60/180	18	12.5	13	180	3
RS32-80/180	18	15.5	18	180	4.8
RS20-120/180	18	15.3	15.4	180	4.7